



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

DYNAMOMETER DATA SHEET

(Version 1.0)



Models:

DI5B-5.7-FM DI5M-5.7-FM
DI5B-5.7-BM DI5M-5.7-BM

Max continuous power dissipation: 3.37 HP (2.5 kW)
Max Power for 30 seconds: 4.7 HP (3.5 kW)
Max continuous brake torque: 800 in-oz. (5.65 N-m) @ 2,500 RPM
Max Brake Torque: 62.5 in-lbs. (7.06 N-m)
Max brake speed: 8,000 RPM



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

TABLE OF CONTENTS

1. OVERVIEW	4
2. SPEED vs. TORQUE CURVE – MB-5.7 BRAKE	6
3. MOTOR TORQUE & SPEED:	7
4. LOAD CELL (Option 1: DI5B-5.7-FM, Measure Brake Torque).....	7
5. LOAD CELL (Option 2: DI5M-5.7-FM, Measure Motor Torque)	7
5.1 Load Cell Accuracy Plot (in-lbs.)	8
5.2 Load Cell Accuracy Plot (Nm)	9
6. SPEED MEASUREMENT	10
7. DATA SAMPLING	10
8. LAPTOP COMPUTER.....	10
9. POWER REQUIREMENTS	10
10. DC VOLTAGE TRANSDUCERS	11
10.1 Input.....	11
10.2 Output.....	11
10.3 Environmental and Physical Characteristics.....	11
11. AC VOLTAGE TRANSDUCERS – SINGLE PHASE	11
11.1 Input.....	11
11.2 Output.....	11
11.3 Environmental and Physical Characteristics.....	11
12. AC VOLTAGE TRANSDUCERS – THREE PHASE.....	12
12.1 Input.....	12
12.2 Output.....	12
12.3 Environmental and Physical Characteristics.....	12
12.4 Applications	12
13. DC CURRENT TRANSDUCERS (Split Core)	13
13.1 Input.....	13
13.2 Output.....	13
13.3 Environmental and Physical Characteristics.....	13



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

14. AC CURRENT TRANSDUCERS – SINGLE PHASE (Split Core)	13
14.1 Input.....	13
14.2 Output.....	13
14.3 Environmental and Physical Characteristics	13
15. AC CURRENT TRANSDUCERS – THREE PHASE (Low Current)	14
15.1 Input.....	14
15.2 Output.....	14
15.3 Environmental and Physical Characteristics	14
16. AC CURRENT TRANSDUCERS – THREE PHASE (High Current).....	15
16.1 Input.....	15
16.2 Output.....	15
16.3 Environmental and Physical Characteristics	15
17. DYNAMOMETER LAYOUT – DI5B-5.7-FM, L.C. ON BRAKE (OPTION 1)	16
18. MOTOR MOUNTING PLATE – DI5B	17
19. DYNAMOMETER LAYOUT – DI5B-5.7-BM, L.C. ON BRAKE (OPTION 2)	18
20. DYNAMOMETER LAYOUT – DI5M-5.7-FM, L.C. ON MOTOR (OPTION 1).....	19
21. MOTOR MOUNTING PLATE – DI5M.....	20
22. DYNAMOMETER LAYOUT – DI5M-5.7-BM, L.C. ON MOTOR (OPTION 2)	21
23. DYNAMOMETER CONTROLLER.....	22
24. NOMENCLATURE OF DYNAMOMETER PART NUMBER	23




MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

1. OVERVIEW

This data sheet is a reference for the performance specifications of the dynamometer models listed on the cover page.

The MBS dynamometers may be used to test just about any type of motor (i.e. electric, hydraulic, pneumatic, reciprocating). Types of testing include: endurance testing, speed versus torque curves, measure stall torque, efficiency, temperature rise, performance verification, etc. MBS dynamometers are sold as complete systems (shown in image below) that include: the dynamometer, controller, computer with software, calibration weight, manual and all cables. Our systems do not require annual fees, licenses or permits. The software is user friendly, is very configurable (i.e. changing units, display scale limits, data acquisition rate, etc.) and has some safety precautions build in to prevent damage to the motor under test and/or the system (i.e. brake temperature sensor, setting current limit, setting power limit, trigger input signals).

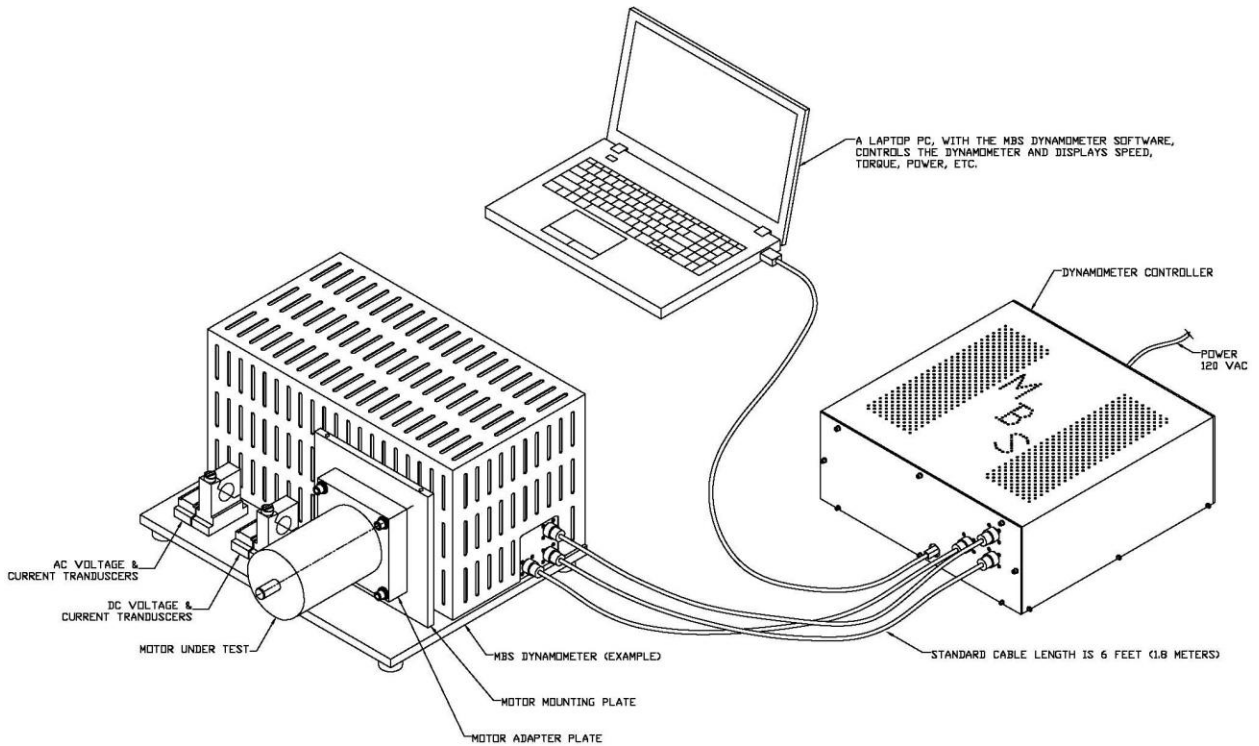

The nomenclature of the dynamometer part number is described at the end of this document. The power dissipation rating for this system is located on the bottom of the cover page. This data sheet may also be used to determine the best configuration for a system.

Dynamometers, or more specifically the size of the brakes for the dynamometers, are selected based on the required power dissipation and required torque.



MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

A belt coupled system will provide a much broader range of torque supplied to the motor under test, which makes a dynamometer more cost effective and diverse than a direct drive system.

The location of the load cell is optional but must be decided prior to purchasing a dynamometer. Placing the load cell so that it measures the torque of the motor (i.e. Model DI5M-5.7-BM) may provide the most accurate torque readings; however, the range of torque that the system can measure is limited to the maximum load of the load cell and the accuracy at low loads; this can be seen in Section 5, Load Cell Accuracy Plots.


Alternatively, placing the load cell so that it measures the torque of the brake (i.e. Model DI5B-5.7-FM) omits measuring rogue torque loads to the motor (i.e. bumping power cables during test); however, now the load cell will not measure bearing friction (which is usually negligible) and any other minor losses. When measuring the brake torque, the air drag from the brake is not measured; however, the dynamometer software compensates for the air drag.

The motor torque, speed, voltage and current ranges (and types; i.e. DC, AC, AC-3ph) need to be specified when purchasing a dynamometer in order to select the limits for the instrumentation. The following performance specifications for load cells, transducers, etc. are based on vendor specifications.



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

2. SPEED vs. TORQUE CURVE – MB-5.7 BRAKE

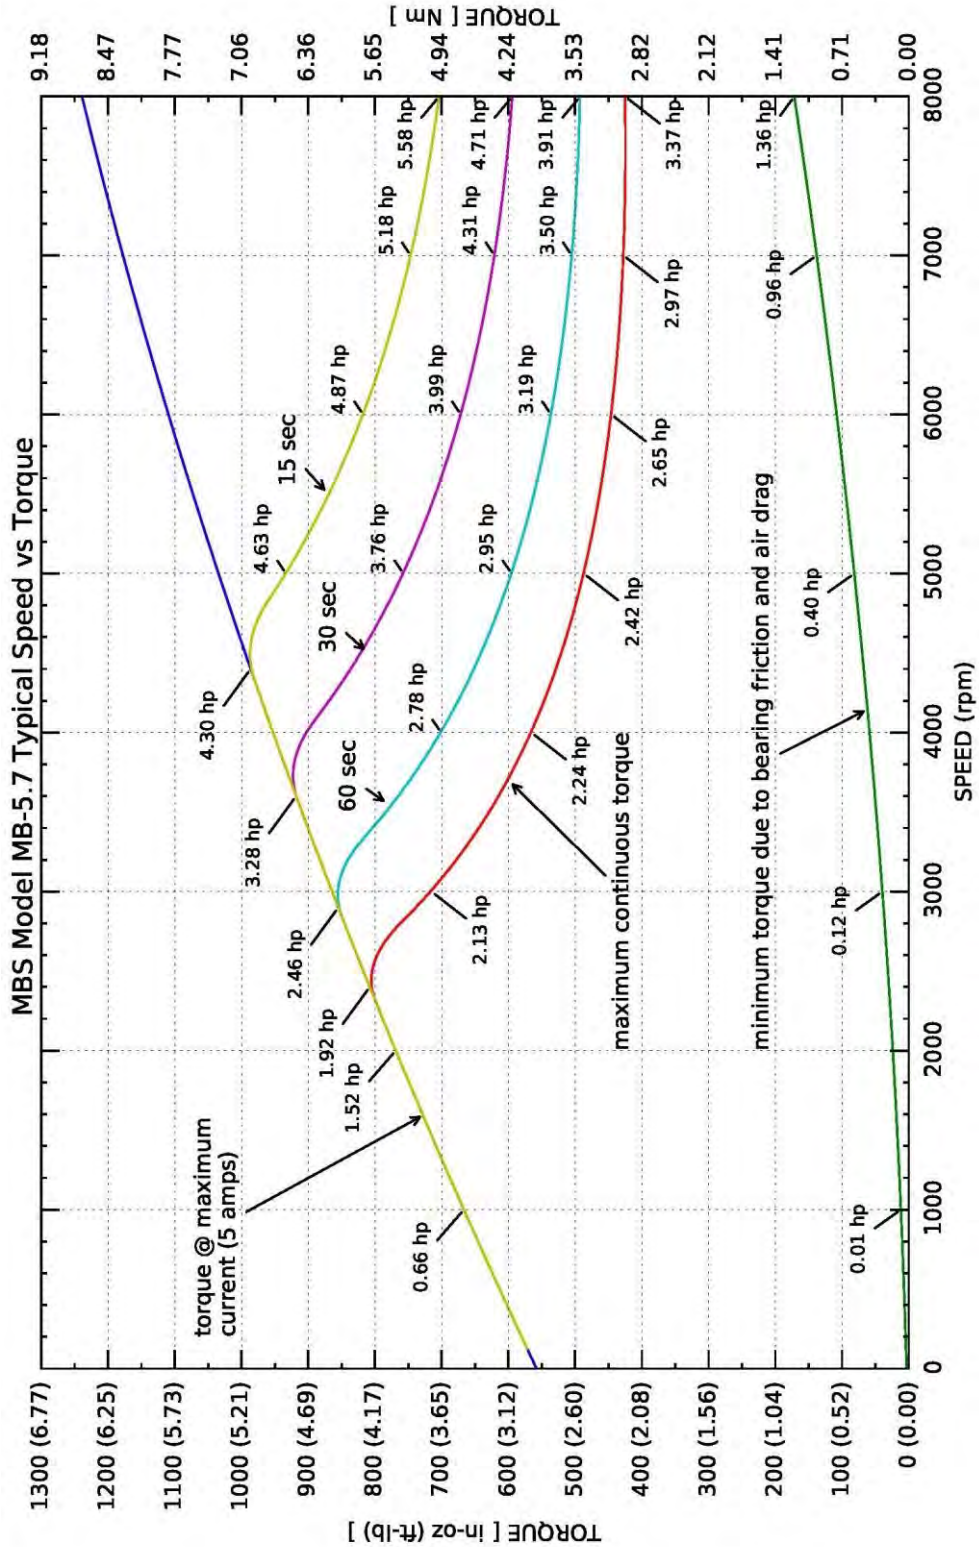



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

3. MOTOR TORQUE & SPEED:

Brake Torque (in-oz.)	Brake_Spd (RPM)	Power (HP)	Time (sec)	Pulley Ratio (motor/brake)	Motor Torque (in-oz.)	Motor_Spd (RPM)
560	0	0	cont.	Direct drive	560	0
800	2,500	1.9	cont.	Direct drive	800	2,500
600	3,600	2.42	cont.	Direct drive	600	3,600
920	3,600	3.28	30	Direct drive	920	3,600
425	8,000	3.37	cont.	Direct drive	425	8,000
593	8,000	4.71	30	Direct drive	593	8,000

Table 1: Torque, Speed and Power

The table is based on the performance graph for the MBZ-5.7 Brake, shown in Section 2.

4. LOAD CELL (Option 1: DI5B-5.7-FM, Measure Brake Torque)

Max Brake Torque	62.5 in-lbs. (7.06 Nm) *
Max Torque to L.C	88 in-lbs. (10 Nm)
Non-Linearity	0.02% of Rated Output (R.O.)
Hysteresis	0.02% of R.O.
Non-Repeatability	0.02% of R.O.
Zero Balance	±1% of R.O.
Compensated Temperature Range	14°F to 104°F
Safe Temperature Range	14°F to 140°F
Temperature Effect on Output	0.002% of Load/°F
Temperature Effect on Zero	0.002% of Load/°F
Safe Overload	150% of R.O.*

5. LOAD CELL (Option 2: DI5M-5.7-FM, Measure Motor Torque)

Max Brake Torque	62.5 in-lbs. (7.06 Nm) *
Max Torque to L.C	88 in-lbs. (10 Nm)
Non-Linearity	0.02% of R.O.
Hysteresis	0.02% of R.O.
Non-Repeatability	0.02% of R.O.
Zero Balance	±1% of R.O.
Compensated Temperature Range	14°F to 104°F
Safe Temperature Range	14°F to 140°F
Temperature Effect on Output	0.002% of Load/°F
Temperature Effect on Zero	0.002% of Load/°F
Safe Overload	150% of R.O.**

* 62.5 in-lbs. is the standard maximum brake torque; if this value is changed, the load cell may also need to be changed.

** Hard stops are in place to help prevent damage from over-load.




MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

5.1 Load Cell Accuracy Plot (in-lbs.)

The Torque Error plot shows the percentage error as a function of measured torque. These plots show the range that a load cell will accurately measure. The maximum torque to the motor is based on the maximum torque from the brake. The error plot is based on published data from the load cell vendor.

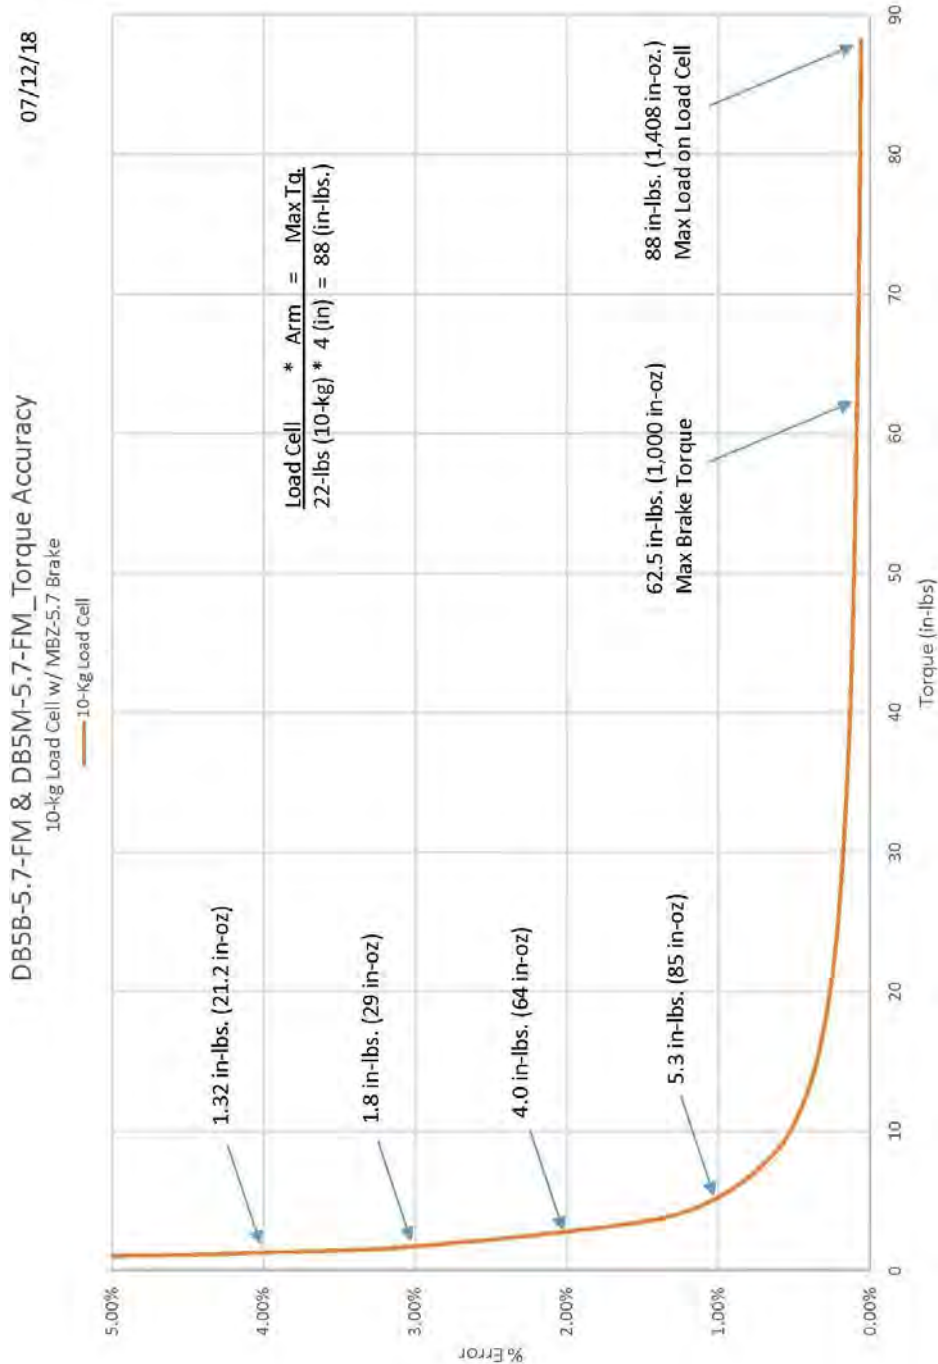




MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

5.2 Load Cell Accuracy Plot (Nm)

The Torque Error plot shows the percentage error as a function of measured torque. These plots show the range that a load cell will accurately measure. The maximum torque to the motor is based on maximum torque from the brake. The error plot is based on published data from the load cell vendor.

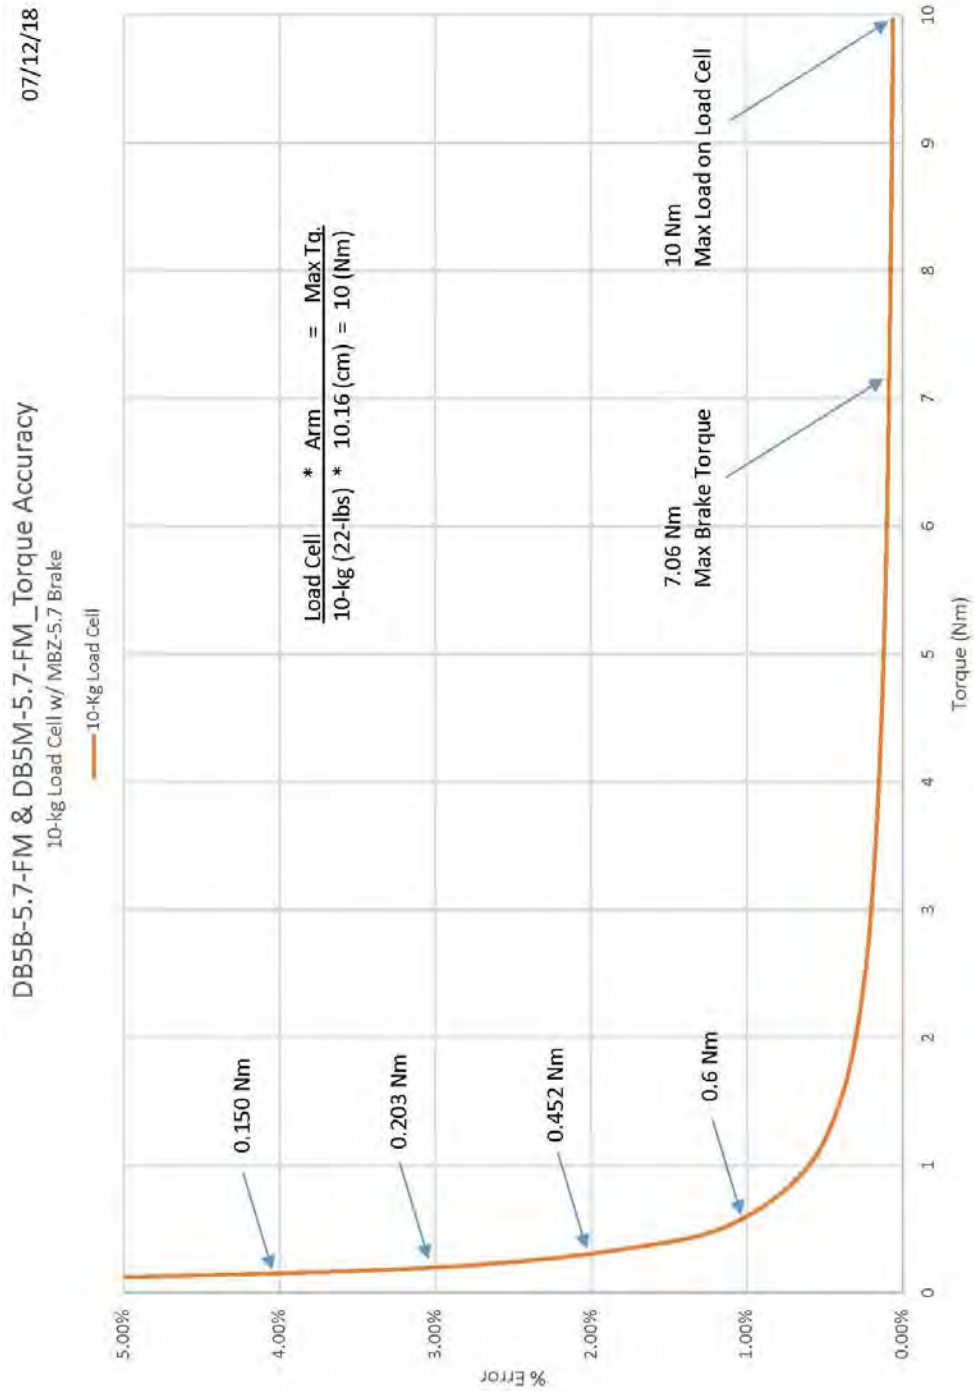



MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

6. SPEED MEASUREMENT

A standard brake has five magnets (alternative quantity are optional) which trigger a hall effect sensor. The speed is averaged over one revolution of the brake. A 48-MHZ clock is used to measure the time between magnets.

Parameter	Conditions	Min.	Typ.	Max.	Units
Clock Error	~25°C		±30		PPM
	-10°C to 60°C		±50		PPM
	-40°C to 85°C		±100		PPM
Brake Speed	5 magnets	12		180*	KPM
	30 magnets	2		30*	KPM

* Theoretical speed; actual maximum speed is limited to the speed of the brake.

7. DATA SAMPLING

Sampling is the frequency of measuring and recording data; this rate is adjustable by the operator.

Parameter	Conditions	Min.	Typ.	Max.	Units
Sampling Rate	2.3 GHz Proc.	20	50	-	ms

i.e. 50 ms = 20 samples (or readings) per second.

8. LAPTOP COMPUTER

Parameter	Conditions	Min.	Typ.	Max.	Units
Processor		2.3			GHz
Memory		8			GB
Display	LED LCD		15.6		inches

9. POWER REQUIREMENTS

The MBS Dynamometer requires two 115 or 230 VAC power outlets: one for the laptop computer and one for the controller. The brakes in the dynamometer structure receive power from the controller.

Item	Voltage	Type	Current (amps)	Freq. (Hz)	# Plugs
Controller	115/230	VAC	1.1/0.6	50/60	1
Laptop	110-240	VAC	1.2	50/60	1
Dynamometer	24	VDC	6.0	-	none



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

10. DC VOLTAGE TRANSDUCERS

10.1 Input

Range 0 VDC to: 1, 5, 10, 50, 150, 200 up to 600 VDC
Overload 2x voltage range selected
Frequency Range DC only

10.2 Output

Basic Accuracy 1.0%
Linearity 10% to 100% F.S.
Thermal Drift 500 PPM/C
Response Time 250 ms

10.3 Environmental and Physical Characteristics

Operating Temperature 0C to +50C
Insulation Category CAT II
Vibration Tested to IEC 60068-2-6, 1995
Pollution Degree 2
Altitude 2000-meter max.
Insulation Voltage 2500 VDC
MTBF Greater than 100K hours
Relative Humidity 5% to 95%, non-condensing
Weight 0.5 lbs.

11. AC VOLTAGE TRANSDUCERS – SINGLE PHASE

11.1 Input

Range 0 VAC to: 50, 150, 250, 500, 600 VAC
Overload 2x voltage range selected
Frequency Range 20 Hz to 5 kHz

11.2 Output

Basic Accuracy 0.5%
Linearity 10% to 100% F.S.
Calibration True RMS sensing
Thermal Drift 500 PPM/C
Response Time 250 ms

11.3 Environmental and Physical Characteristics

Operating Temperature 0C to +60C
Insulation Category CAT II
Vibration Tested to IEC 60068-2-6, 1995
Pollution Degree 2
Altitude 2000-meter max.
Insulation Voltage 2500 VDC
MTBF Greater than 100K hours
Relative Humidity 5% to 95%, non-condensing
Weight 0.5 lbs.



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

12. AC VOLTAGE TRANSDUCERS – THREE PHASE

12.1 Input

Range 0 VAC to: 50, 150, 250, 500, 600 VAC
Overload 2x voltage range selected
Frequency Range 20 Hz to 5 kHz

12.2 Output

Basic Accuracy 0.5%
Linearity 10% to 100% F.S.
Calibration True RMS sensing
Thermal Drift 500 PPM/°C
Response Time 250 ms

12.3 Environmental and Physical Characteristics

Operating Temperature 0°C to +60°C
Insulation Category CAT II
Vibration Tested to IEC 60068-2-6, 1995
Pollution Degree 2
Altitude 2000-meter max.
Insulation Voltage 2500 VDC
MTBF Greater than 100K hours
Relative Humidity 5% to 95%, non-condensing
Weight 0.5 lbs.

12.4 Applications

Harmonic voltages
Chopped waveform drivers
Quickly varying voltage supplies
Phase fired controlled devices



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

13. DC CURRENT TRANSDUCERS (Split Core)

13.1 Input

Range 0 ADC to: 2, 5, 10, 20, 30, 50, 75, 100 up to 600 ADC
Overload 4x current range selected
Frequency Range DC only

13.2 Output

Basic Accuracy 1.0%
Linearity 10% to 100% F.S.
Thermal Drift 500 PPM/°C
Response Time 250 ms

13.3 Environmental and Physical Characteristics

Operating Temperature 0°C to +50°C
Insulation Category CAT II
Vibration Tested to IEC 60068-2-6, 1995
Pollution Degree 2
Altitude 2000-meter max.
Insulation Voltage 2500 VDC
MTBF Greater than 100K hours
Relative Humidity 5% to 95%, non-condensing
Weight 0.5 lbs.

14. AC CURRENT TRANSDUCERS – SINGLE PHASE (Split Core)

14.1 Input

Range 0 AAC to: 5, 10, 15, 20, 25, 30, 40, 50 up to 600 AAC
Overload 4x current range selected
Frequency Range 20 Hz to 5 kHz

14.2 Output

Basic Accuracy 0.5%
Linearity 10% to 100% F.S.
Calibration True RMS sensing
Thermal Drift 500 PPM/°C
Response Time 250 ms

14.3 Environmental and Physical Characteristics

Operating Temperature 0°C to +60°C
Insulation Category CAT II
Vibration Tested to IEC 60068-2-6, 1995
Pollution Degree 2
Altitude 2000-meter max.
Insulation Voltage 2500 VDC
MTBF Greater than 100K hours
Relative Humidity 5% to 95%, non-condensing
Weight 0.5 lbs.



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

15. AC CURRENT TRANSDUCERS – THREE PHASE (Low Current)

15.1 Input

Range 0 AAC to: 0.5, 5, 10, 15, 16, 20, 25 AAC
Overload 4x current range selected
Frequency Range 20 Hz to 5 kHz

15.2 Output

Basic Accuracy 0.5%
Linearity 10% to 100% F.S.
Calibration True RMS sensing
Thermal Drift 500 PPM/°C
Response Time 250 ms max., 0 - 90%

15.3 Environmental and Physical Characteristics

Operating Temperature 0°C to +60°C
Insulation Category CAT II
Vibration Tested to IEC 60068-2-6, 1995
Pollution Degree 2
Altitude 2000-meter max.
Insulation Voltage 2500 VDC
MTBF Greater than 100K hours
Relative Humidity 5% to 95%, non-condensing
Weight 0.5 lbs.



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

16. AC CURRENT TRANSDUCERS – THREE PHASE (High Current)

16.1 Input

Table with 2 columns: Parameter and Value. Parameters include Range, Overload (per range selected), and Frequency Range.

16.2 Output

Table with 2 columns: Parameter and Value. Parameters include Current Signal, Accuracy, and Ripple.

(Specified accuracy includes the combined worst-case effects of 4mA Offset, Temperature, Hysteresis, Supply Swings and Current Cable Positioning.)

Table with 2 columns: Parameter and Value. Parameters include Response Time, Load Resistance, Crest Factors, Current Signal @ Overload, and Output Protection.

16.3 Environmental and Physical Characteristics


Table with 2 columns: Parameter and Value. Parameters include Operating Temperature Range, Conducted Susceptibility, Transient Burst, Electrostatic Discharge, Humidity, Moisture Resistance, Random Vibration, Shock, Isolation, Insulation Resistance, Case Material, Finish, and Weight.



MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.


17. DYNAMOMETER LAYOUT - DI5B-5.7-FM, L.C. ON BRAKE (OPTION 1)

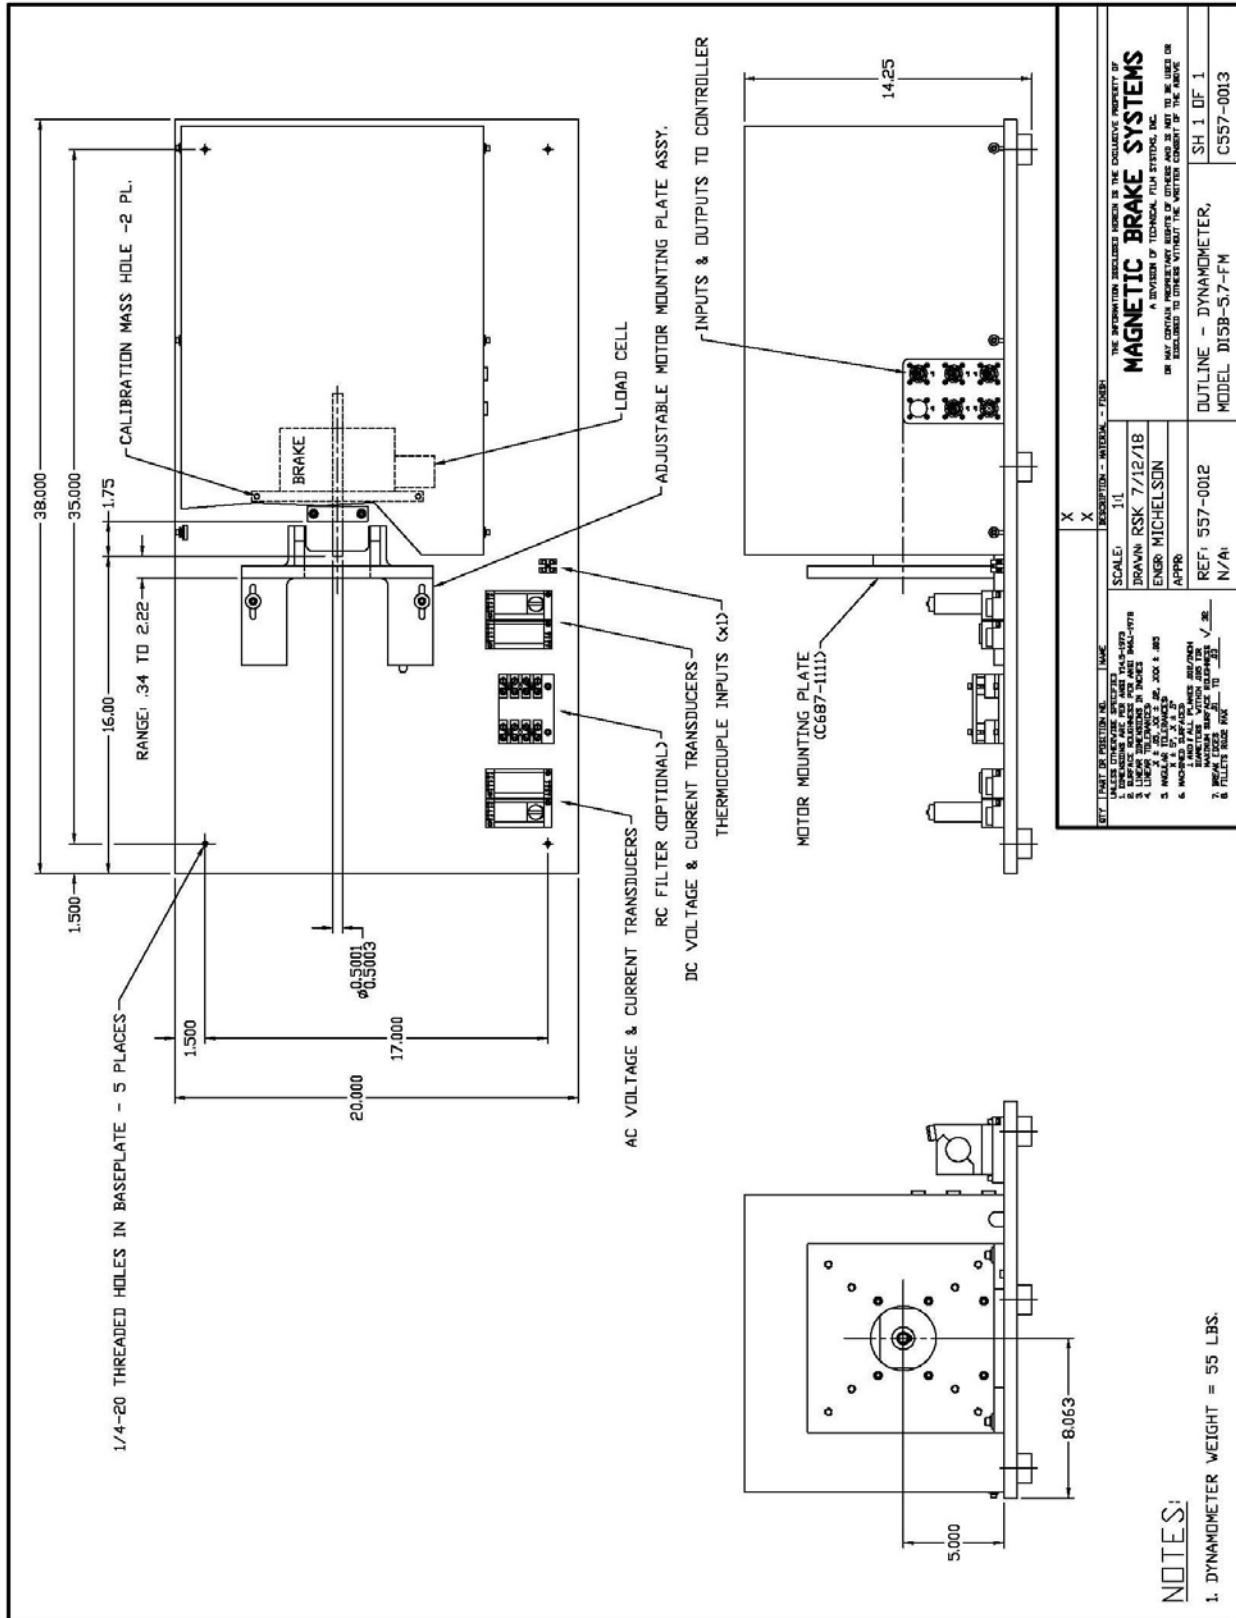



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

18. MOTOR MOUNTING PLATE - DI5B

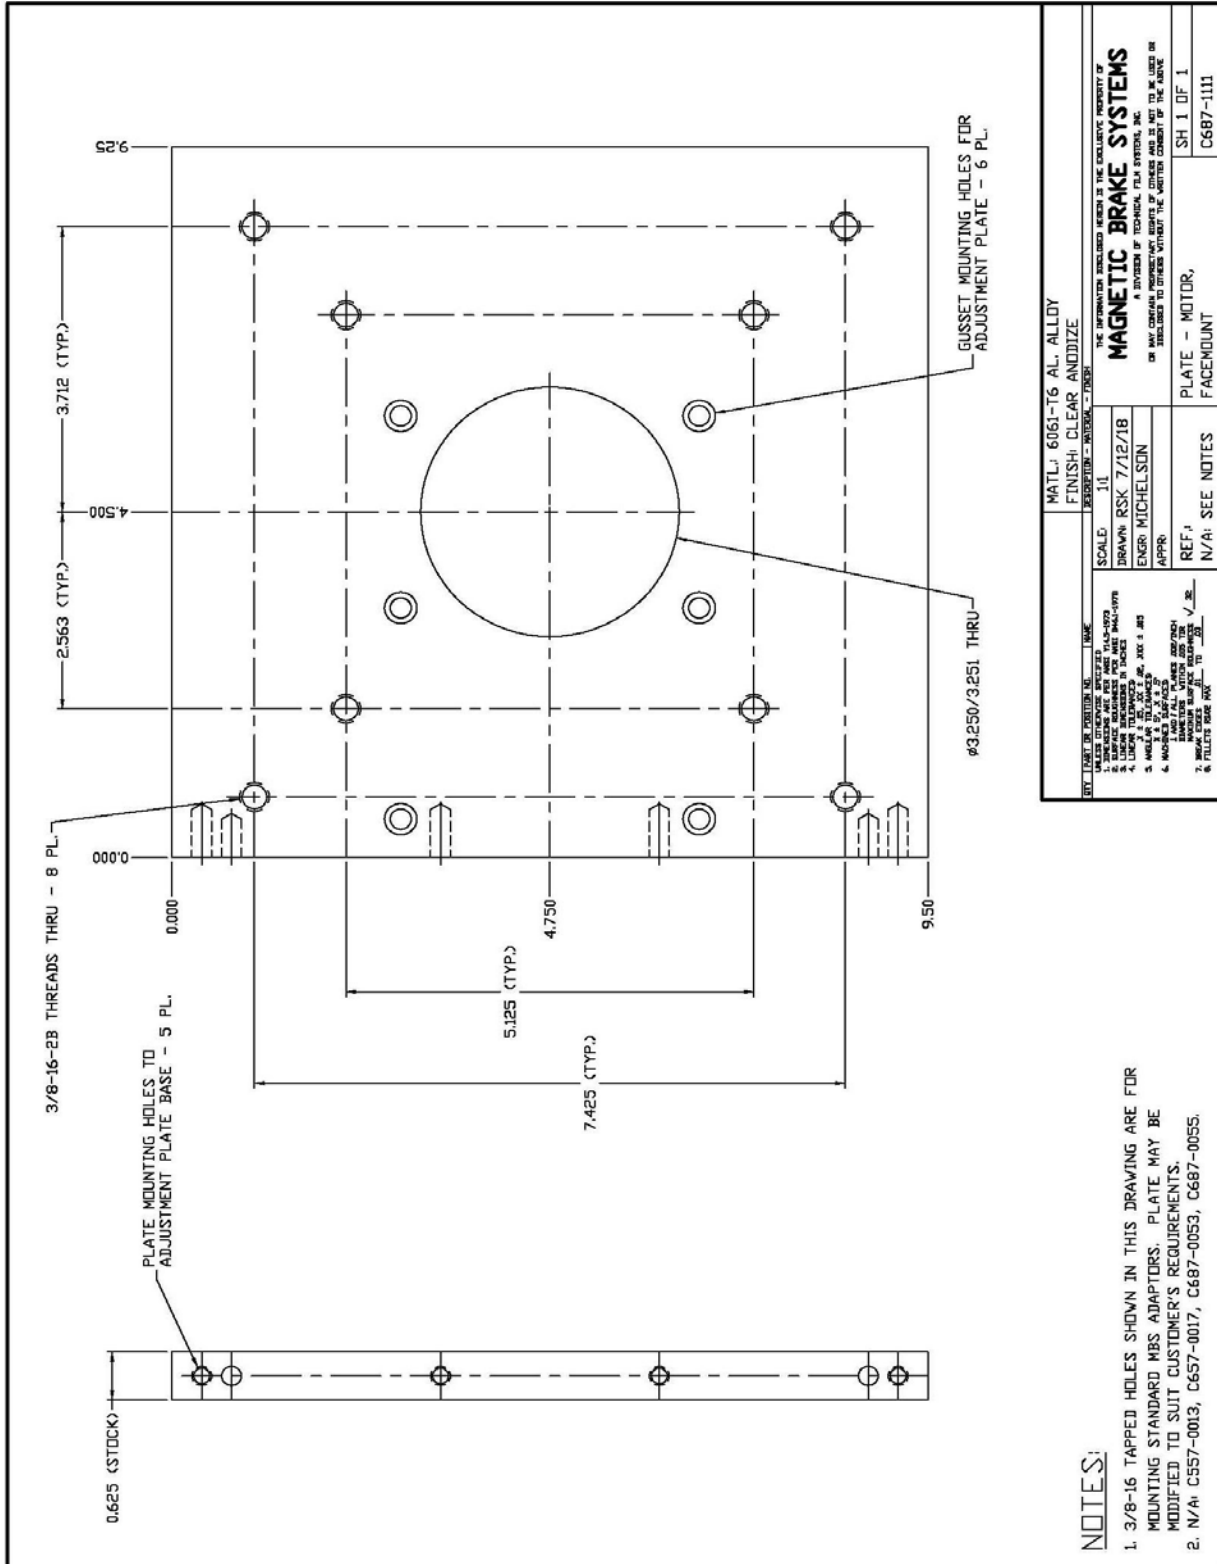

ITEM NAME OR DESCRIPTION	QTY	UNIT	MATERIAL	FINISH	REMARKS
PLATE MOUNTING HOLES TO ADJUSTMENT PLATE BASE - 5 PL.			6061-T6 AL.	CLEAR ANODIZE	
3/8-16-2B THREADS THRU - 8 PL.					
GUSSET MOUNTING HOLES FOR ADJUSTMENT PLATE - 6 PL.					
PLATE - MOTOR, FACEMOUNT					

NOTES:

- 3/8-16 TAPPED HOLES SHOWN IN THIS DRAWING ARE FOR MOUNTING STANDARD MBS ADAPTORS. PLATE MAY BE MODIFIED TO SUIT CUSTOMER'S REQUIREMENTS.
- N/A: C557-0013, C657-0017, C687-0053, C687-0055.


SCALE	1:1	ENGR. MICHELSON	DATE	7/12/78
DRAWN	RSK	APPR.		
MAGNETIC BRAKE SYSTEMS				
THE INFORMATION ENCLOSED HEREIN IS THE EXCLUSIVE PROPERTY OF MAGNETIC BRAKE SYSTEMS, INC. IT IS TO BE USED ONLY FOR THE PROJECT AND FOR THE CUSTOMER'S USE. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF THE AUTHOR.				
MATERIAL: 6061-T6 AL. ALLOY			SH 1 OF 1	
FINISH: CLEAR ANODIZE			C687-1111	
REVISIONS: NONE				
REF: 1			N/A: SEE NOTES	



MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

19. DYNAMOMETER LAYOUT – DI5B-5.7-BM, L.C. ON BRAKE (OPTION 2)

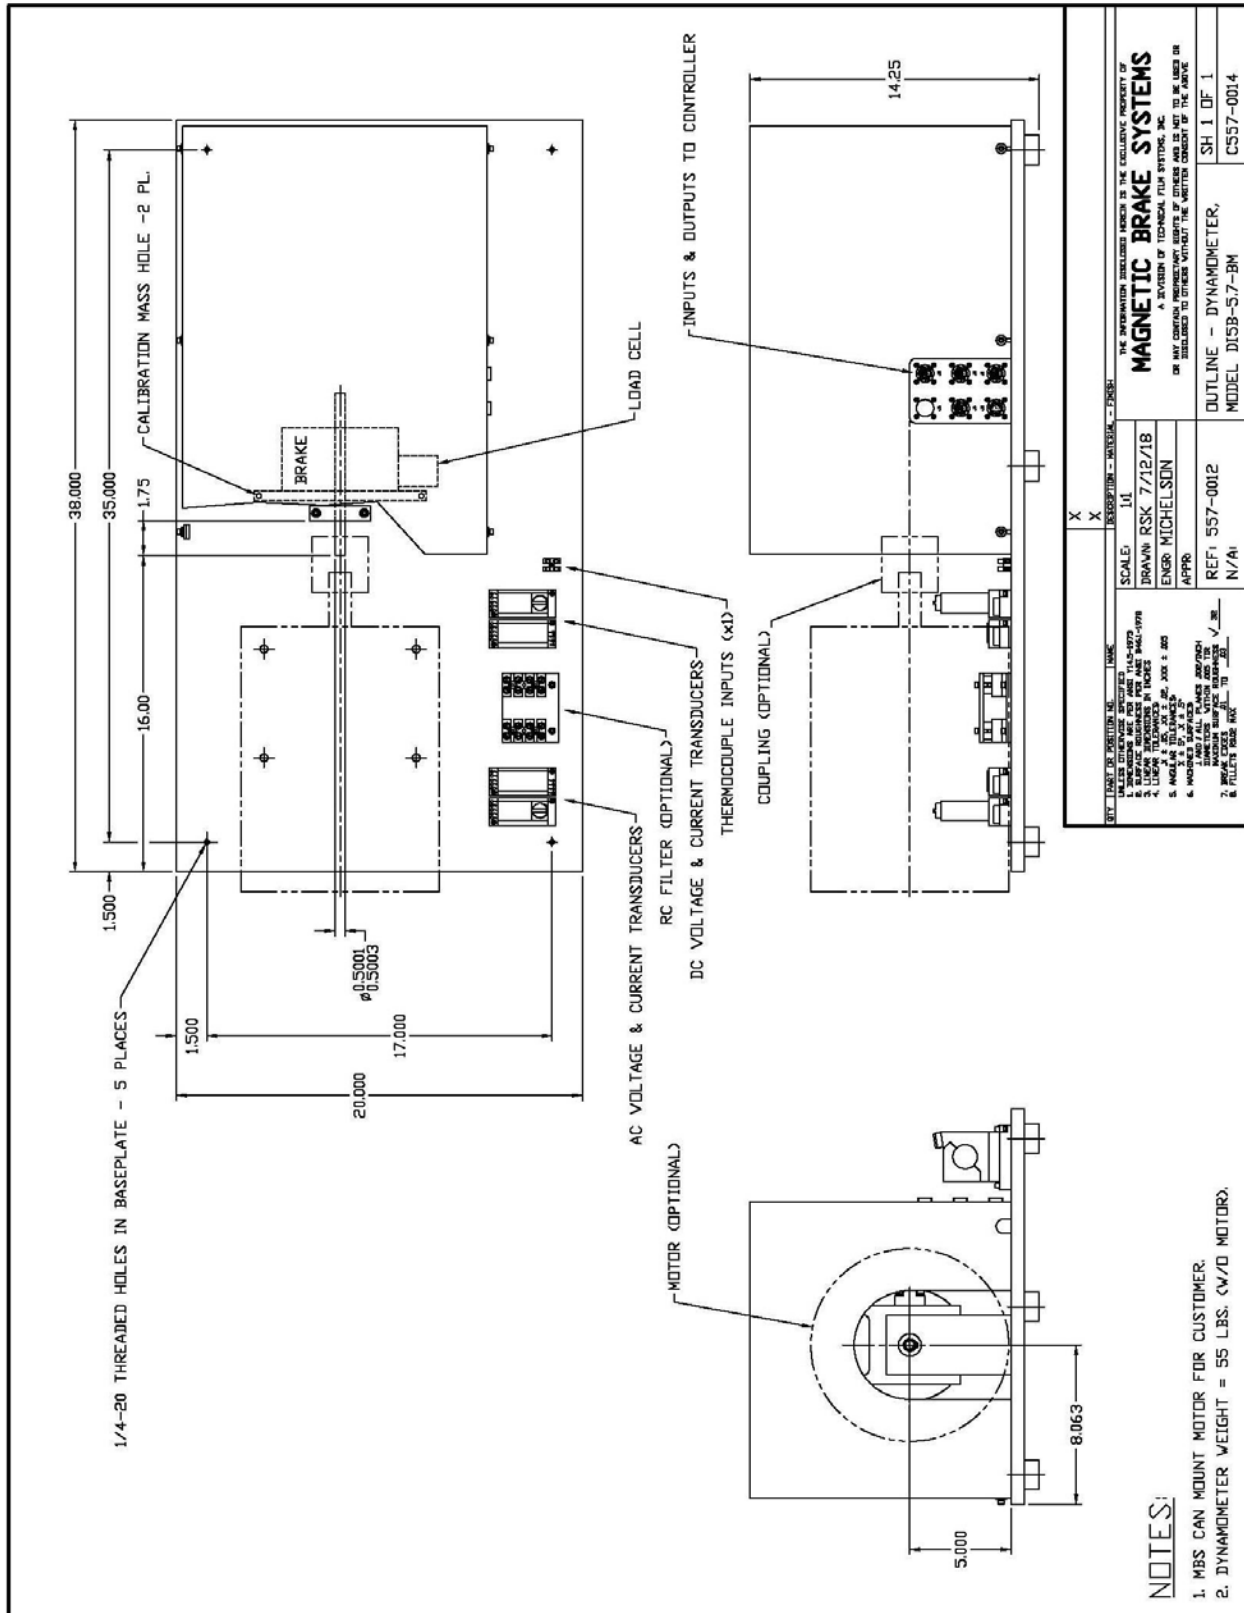




MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.


20. DYNAMOMETER LAYOUT – DI5M-5.7-FM, L.C. ON MOTOR (OPTION 1)

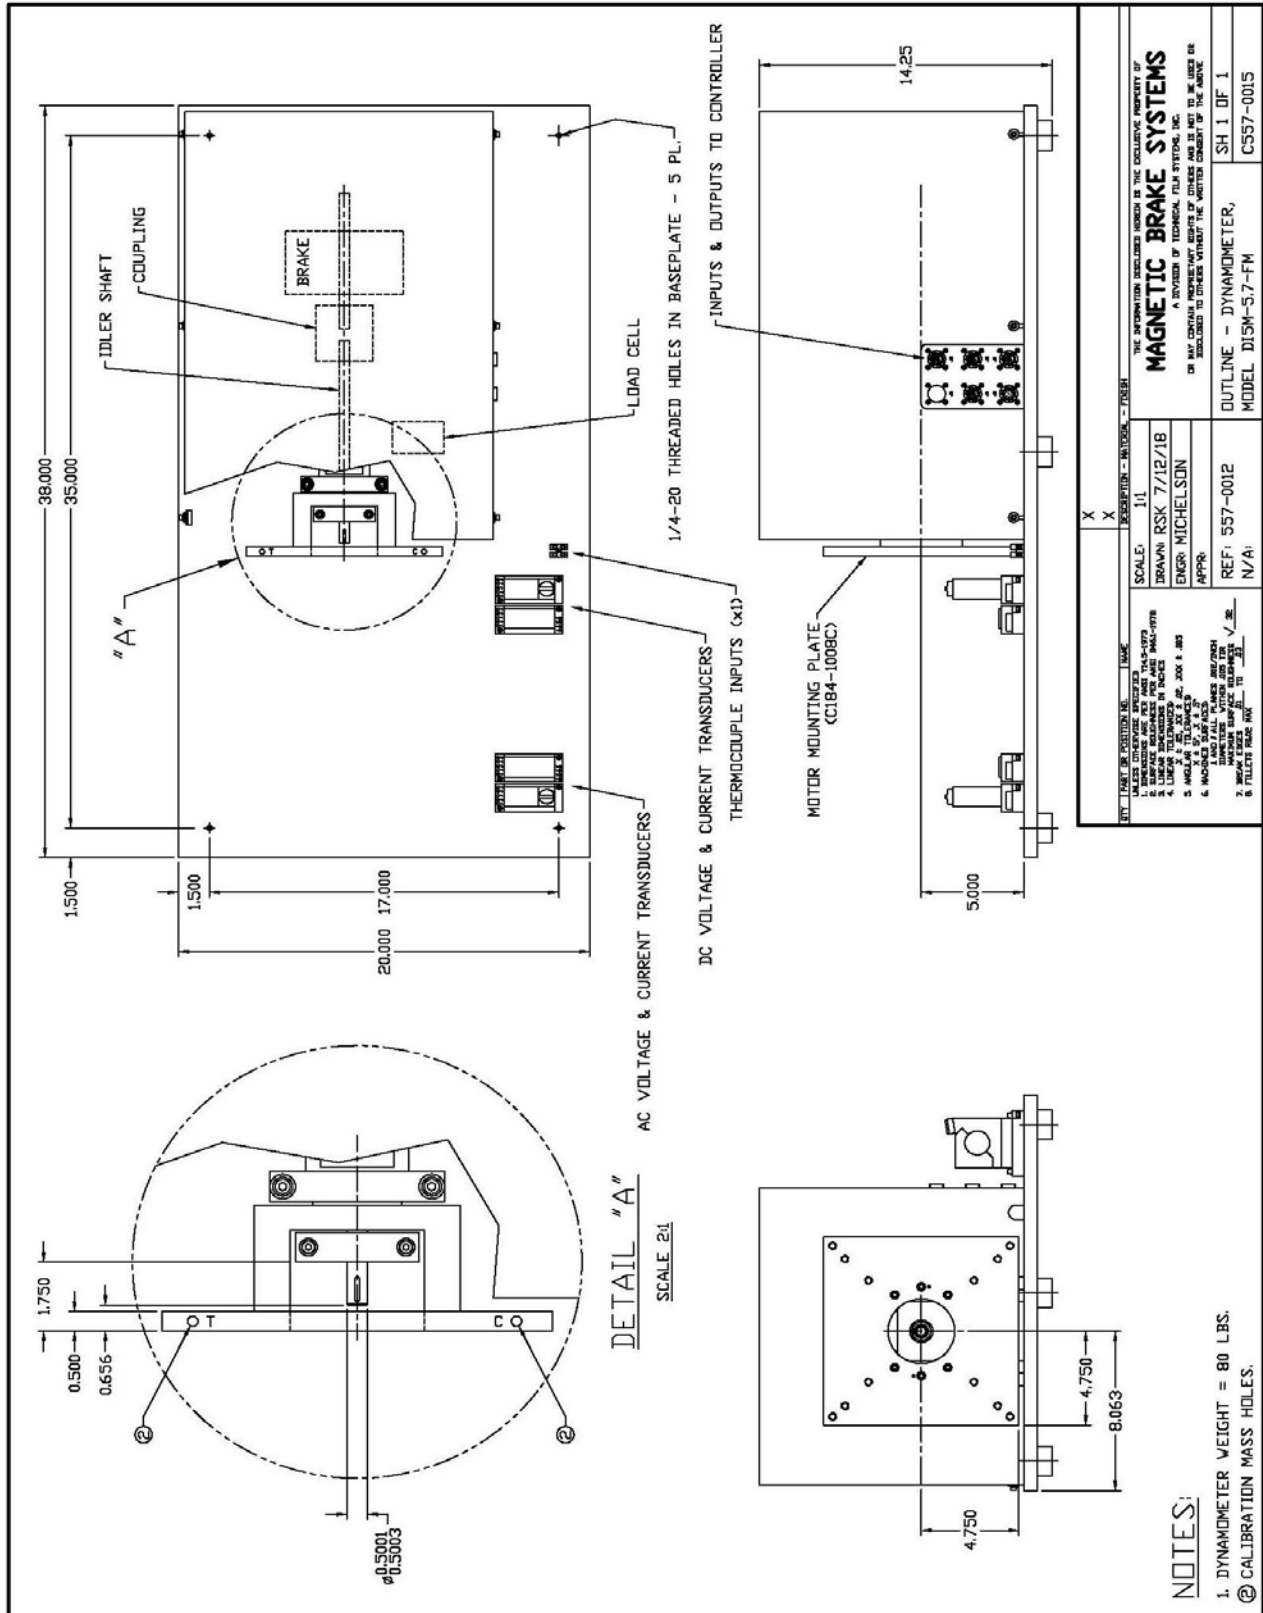



MAGNETIC BRAKE SYSTEMS
 A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

21. MOTOR MOUNTING PLATE - DI5M

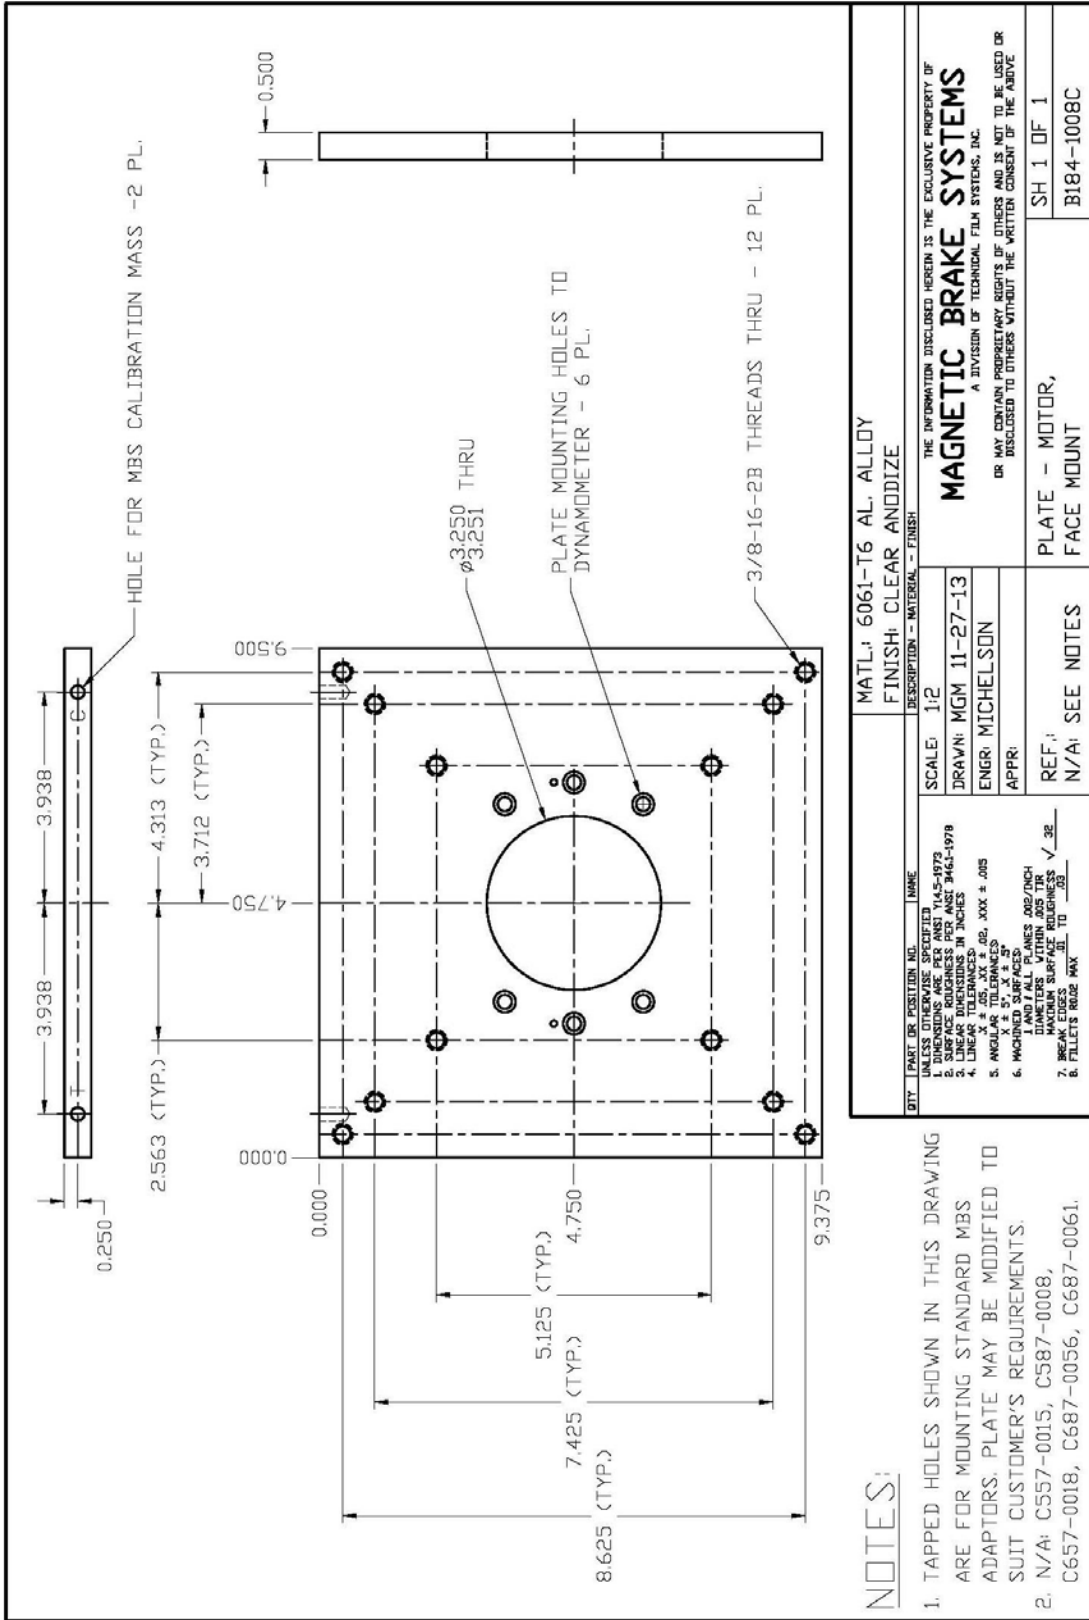




MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

22. DYNAMOMETER LAYOUT – DI5M-5.7-BM, L.C. ON MOTOR (OPTION 2)

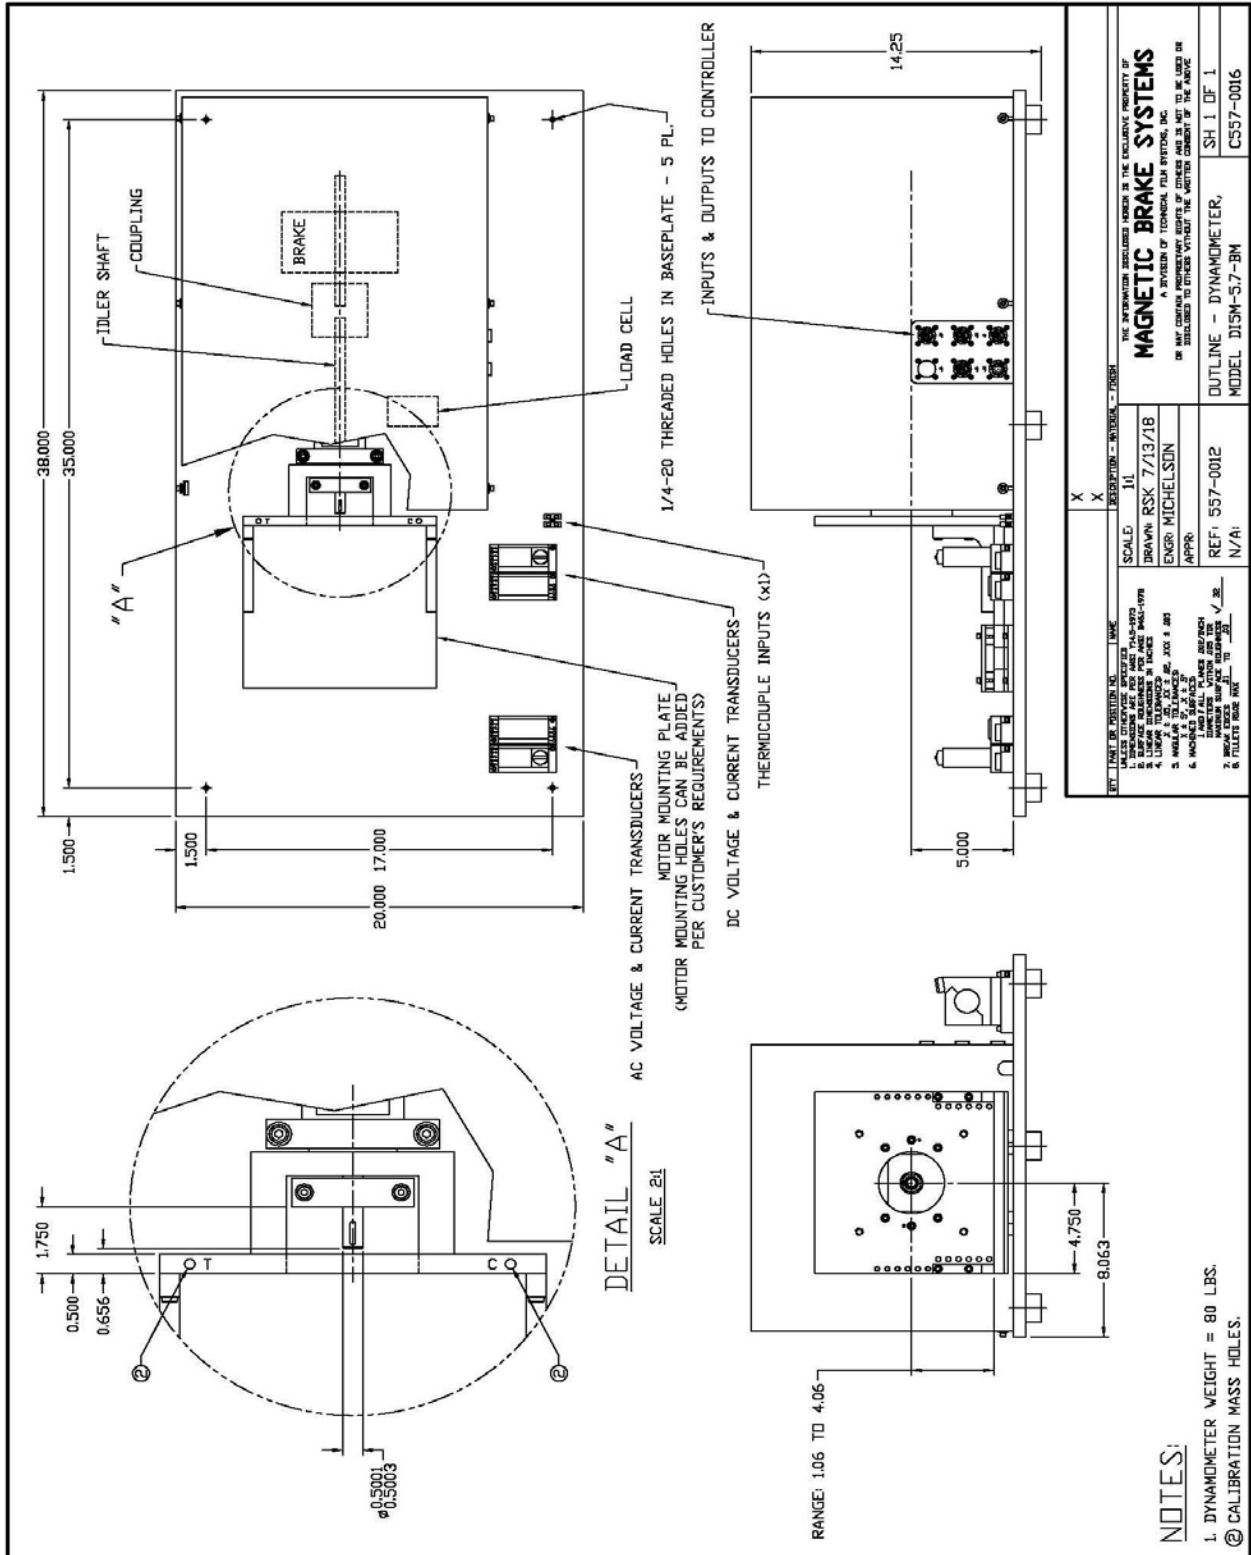




MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

23. DYNAMOMETER CONTROLLER

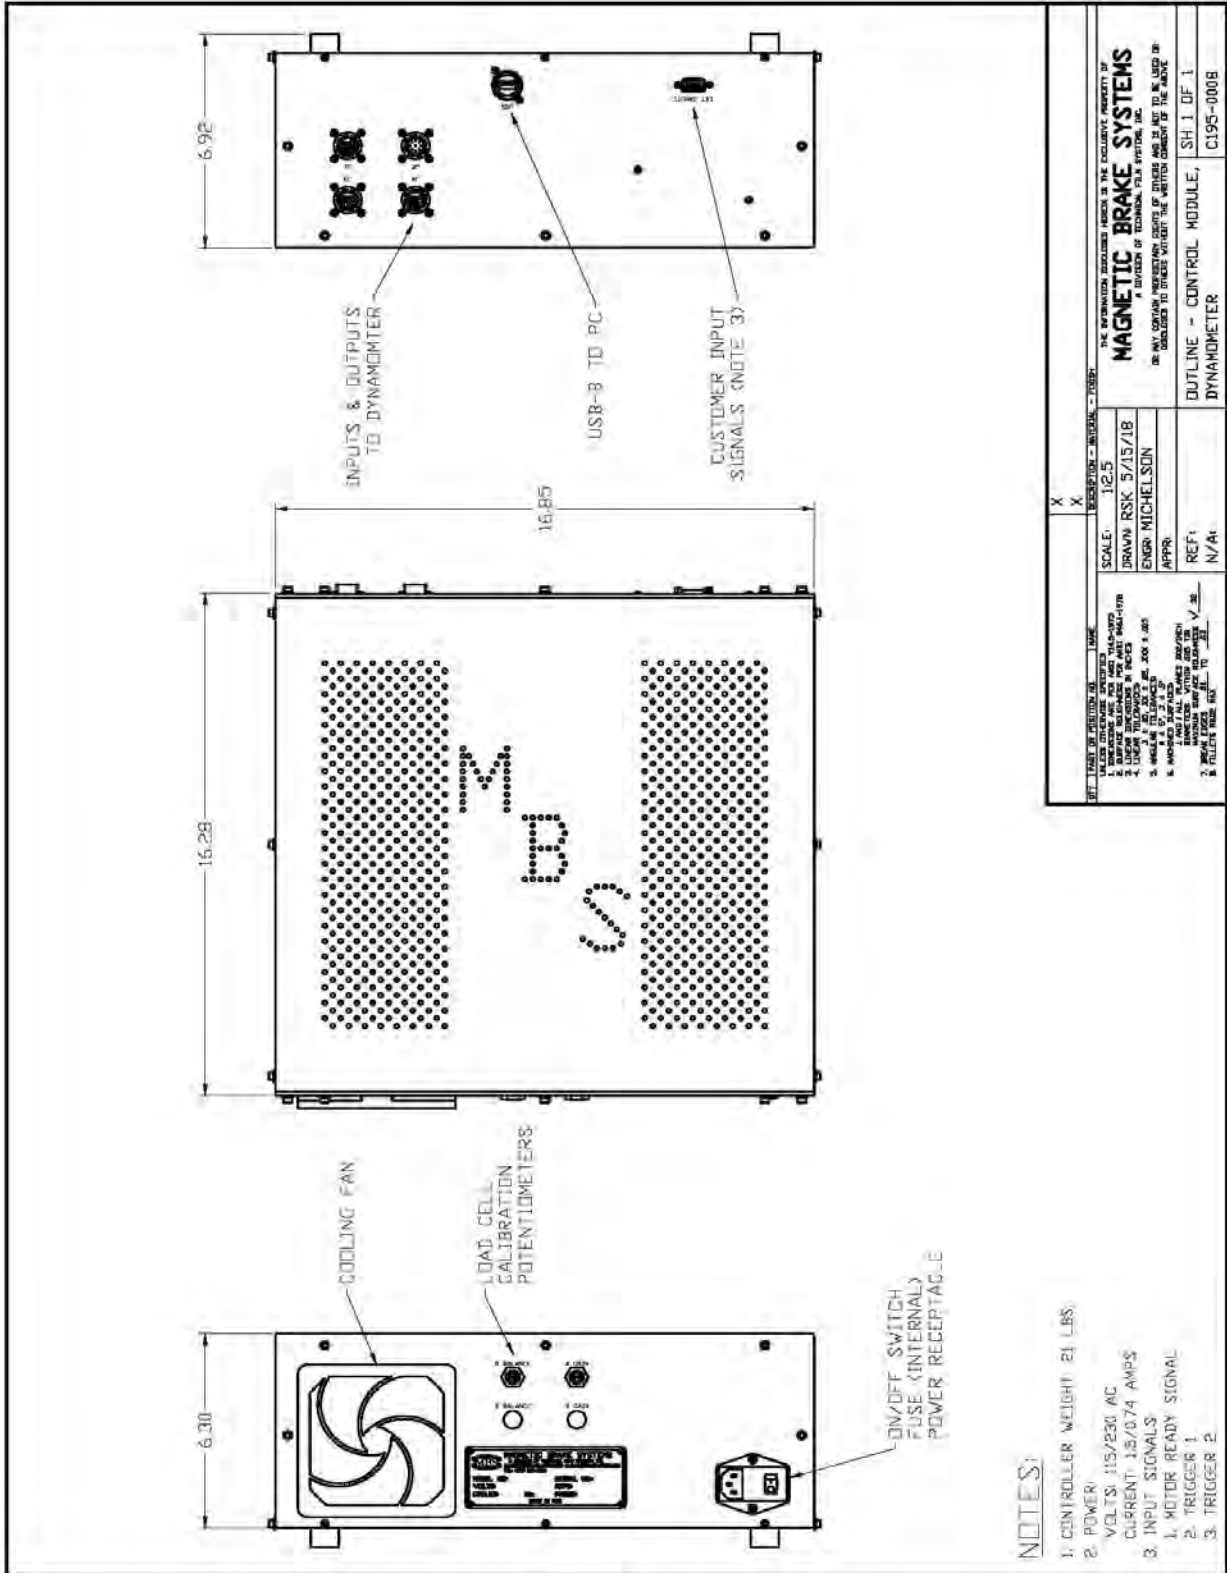

NOTES:

- 1. CONTROLLER WEIGHT: 21 LBS.
- 2. POWER:
VOLTS: 115/230 AC
CURRENT: 15/0.74 AMP'S
- 3. INPUT SIGNALS:
1. MOTOR READY SIGNAL
2. TRIGGER 1
3. TRIGGER 2


DESCRIPTION - MODEL - PART		X	X
THE INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF MAGNETIC BRAKE SYSTEMS A DIVISION OF TECHNICAL FILM SYSTEMS, INC. OR ANY OTHER REGISTERED OFFICE OF EITHER ONE OR BOTH OF THE ABOVE COMPANIES IN WHICH SUCH INFORMATION IS STORED.			
SCALE:	1:2.5		
DRAWN RSK	5/15/18		
ENGR. MICHELSON			
APPR:			
REF:	N/A		
OUTLINE - CONTROL MODULE, DYNAMOMETER		SH 1 OF 1 C195-0008	



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

24. NOMENCLATURE OF DYNAMOMETER PART NUMBER

DB5M-8.7T-FM

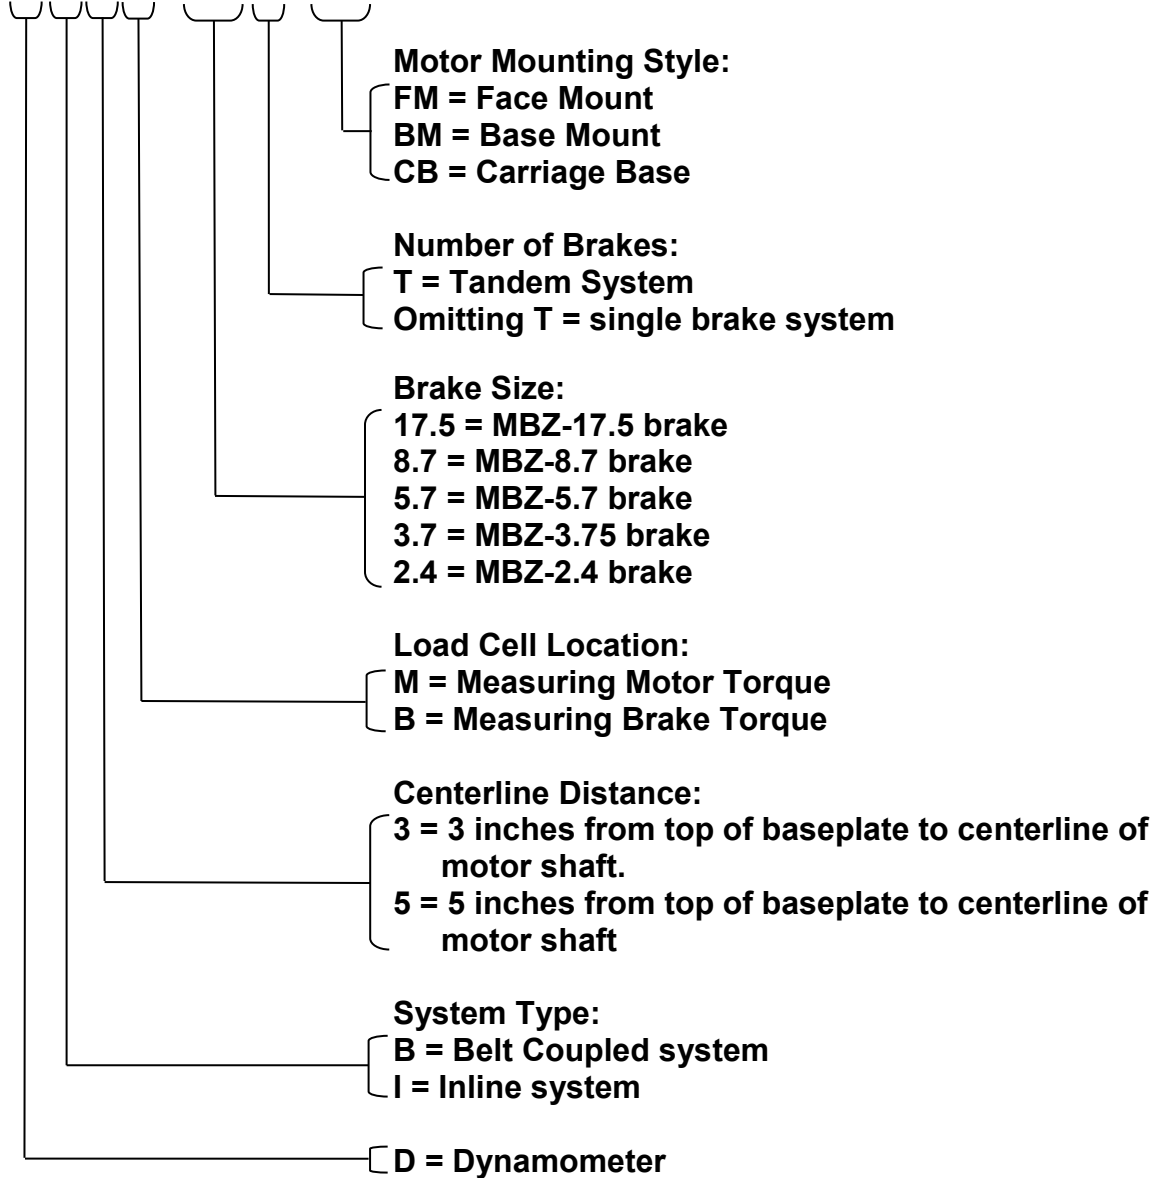

The load cell(s) size(s) and type(s) of voltage & Current transducers are to be specified individually.