



MAGNETIC BRAKE SYSTEMS
A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

DYNAMOMETER DATA SHEET
(VERSION1.0)



DB6B-2.4-FM
DB6B-2.4-BM

DB6M-2.4-FM
DB6M-2.4-BM

10/13/2023



TABLE OF CONTENTS

- 1. OVERVIEW 4
- 2. SPEED vs. TORQUE CURVE – MB-2.4 BRAKE 6
- 3. MOTOR TORQUE & SPEED 7
 - 3.1 Pulley Ratio’s (English Units)..... 7
 - Table 1: Speed, Torque & Power (English Units) 1:4 ratio 7
 - Table 2: Speed, Torque & Power (English Units) 1:1 ratio 7
 - Table 3: Speed, Torque & Power (English Units) 4:1 ratio 7
 - 3.2 Pulley Ratio’s (SI Units) 8
 - Table 4: Speed, Torque & Power (SI Units) 4:1 Pulley Ratio 8
 - Table 5: Speed, Torque & Power (SI Units) 1:1 Pulley Ratio 8
 - Table 6: Speed, Torque & Power (SI Units) 1:4 Pulley Ratio 8
 - 3.3 Load Cell Sizes 9
 - Table 7: Load Cell Reference..... 9
- 4. LOAD CELLS (DB6B-2.4-FM, MEASURING BRAKE TORQUE)..... 9
 - 4.1 Brake Load Cell Accuracy Plot (in-oz.) – Linear 10
 - 4.2 Brake Load Cell Accuracy Plot (N-cm) – Linear 11
- 5. LOAD CELLS (DB6M-2.4T-FM, MEASURING MOTOR TORQUE): 12
 - 5.1 Load Cell #'s 1 through 3. 12
 - 5.2 Load Cell #4..... 12
 - 5.3 Load Cell Accuracy Plot (in-oz.) - Linear 13
 - 5.4 Load Cell Accuracy Plot (in-oz.) – Logarithmic..... 14
 - 5.5 Load Cell Accuracy Plot (Ncm) – Linear 15
 - 5.6 Load Cell Accuracy Plot (Ncm.) – Logarithmic 16
- 6. SPEED 16
- 7. SAMPLING..... 17
- 8. LAPTOP COMPUTER..... 17
- 9. POWER REQUIREMENTS 17
- 10. DC VOLTAGE TRANSDUCERS 18
 - 10.1 Input..... 18
 - 10.2 Output 18
 - 10.3 Environmental and Physical Characteristics 18
- 11. AC VOLTAGE TRANSDUCERS – SINGLE PHASE 18
 - 11.1 Input..... 18
 - 11.2 Output 18
 - 11.3 Environmental and Physical Characteristics 18




12. DC CURRENT TRANSDUCERS (Split Core)	19
12.1 Input	19
12.2 Output	19
12.3 Environmental and Physical Characteristics	19
13. AC CURRENT TRANSDUCERS – SINGLE PHASE (Split Core)	19
13.1 Input	19
13.2 Output	19
13.3 Environmental and Physical Characteristics	19
14. DYNAMOMETER LAYOUT – LOAD CELL ON BRAKE.....	20
15. MOTOR MOUNTING PLATE – FACE MOUNT (DB6B).....	21
16. DYNAMOMETER LAYOUT – L.C. ON MOTOR (OPTION 1 FACE MOUNT)	22
17. MOTOR MOUNTING PLATE – FACE MOUNT (DB6M)	23
18. DYNAMOMETER LAYOUT – L. C. ON MOTOR (OPTION 2 BASE MOUNT)	24
19. MOTOR MOUNTING PLATE – BASE MOUNT (DB6M)	25
20. DYNAMOMETER CONTROLLER.....	26
21. NOMENCLATURE OF DYNAMOMETER MODEL NUMBER	27



1. OVERVIEW

This data sheet is a reference for the performance specifications of the dynamometer models listed on the cover page.

The MBS dynamometers may be used to test just about any type of motor (i.e. electric, hydraulic, pneumatic, reciprocating). Types of testing include: endurance testing, speed versus torque curves, measure stall torque, efficiency, temperature rise, performance verification, etc. MBS dynamometers are sold as complete systems (shown in image below) that include: the dynamometer, controller, computer with software, calibration weight, manual and all cables. MBS systems do not require annual fees, licenses or permits. The software is user friendly, easily configurable (i.e. changing units, display scale limits, data acquisition rate, etc.) and has some safety precautions build in to prevent damage to the motor under test and/or the system (i.e. brake temperature sensor, setting current limit, setting power limit, trigger input signals).

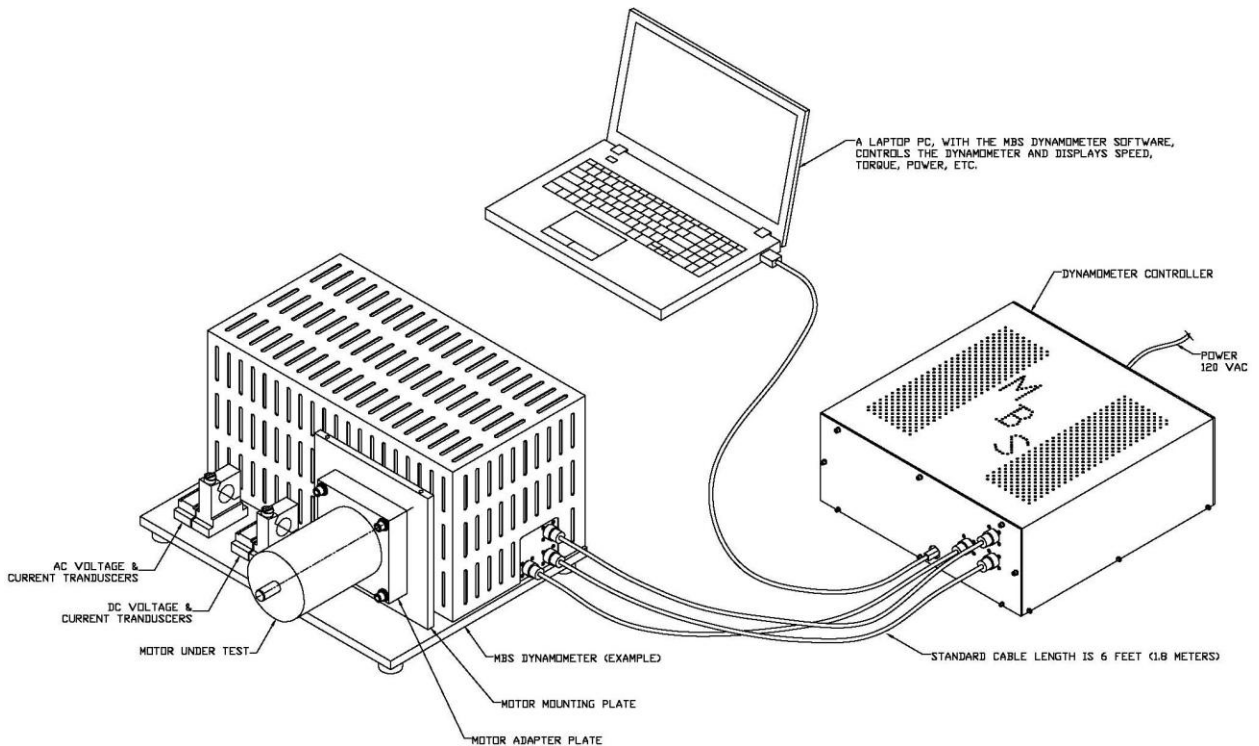

The nomenclature of the dynamometer model number is described at the end of this document. The power dissipation rating for this system is located on the bottom of the cover page. This data sheet may also be used to determine the best configuration for a system.

Dynamometers, or more specifically the size of the brakes for the dynamometers, are selected based on the required power dissipation and required torque.

A belt coupled system will provide a much broader range of torque/speed supplied to the motor under test, which makes a dynamometer more cost-effective and diverse than a direct drive system. The pulleys are mounted to the brake and an idler shaft which the motor is coupled to. The idler shaft strictly provides a torsional load to the motor.



There are two options in load cell configurations for this system.

First option: motor load cell is included (i.e. DB6M-2.4-FM or DB6M-2.4-BM). In this system, the operator may exchange the motor load cell as required in order to provide the highest accuracy of measurement for a specific torque range. Accuracy plots may be viewed in Section 3: Motor Torque and Speed. The brake may also have its own load cell; depends on the customer requirements. For single brake systems, the controller for the brake may use the motor load cell or brake load cell to control the torque of the brake.

The software allows the operator to switch between reading/recording the motor torque and brake torque. In some cases, such as when a motor is placed in an environmental test chamber (the dynamometer remains outside the test chamber), it may not be possible to measure the motor torque.

Second option: motor load cell is not included (i.e. Model DB6B-2.4-FM or DB6B-2.4-BM). For this system, the motor torque is calculated by measuring the brake torque and multiplying by the transmission. Though belt friction, bearing friction and any other minor losses may not be accounted for in the measurements, the bearing friction is usually negligible and a properly aligned belt may have an efficiency as high as 98%. When measuring the brake torque, the air drag from the brake is not measured; however, the dynamometer software compensates for the air drag.


The motor torque, motor speed, voltage range, current range and power type(s) (i.e. DC, AC, AC-3ph) need to be specified when purchasing a dynamometer in order to select the types and limits for the measurement instruments. The following performance specifications for load cells, transducers, etc., are based on vendor specifications.

A certified calibration weight comes with each system. The zero torque and gain are adjusted by the operator as part of the calibration procedure. Calibration takes a couple of minutes and may be performed as often as desired. Customers may use calibrated weights to simulate a specific load to check for torque accuracy.



MAGNETIC BRAKE SYSTEMS

2. SPEED vs. TORQUE CURVE – MB-2.4 BRAKE

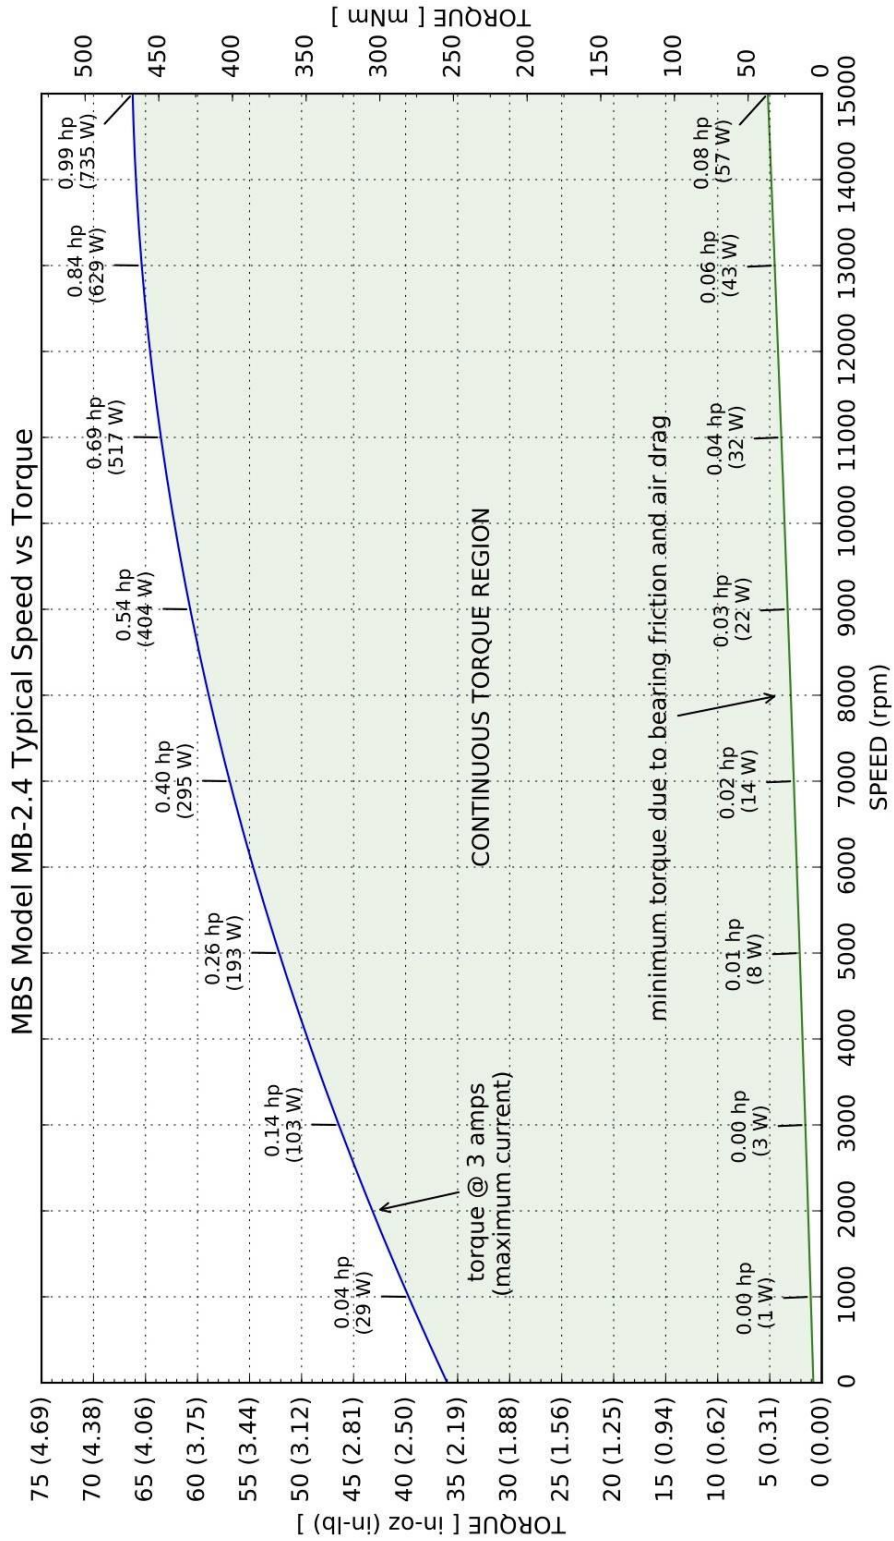



3. MOTOR TORQUE & SPEED

Systems that measure motor torque allow for three options for the load cell arm length: 2-inches, 3-inches, & 4-inches. Possible speed/torque combinations based on different pulley ratios:

3.1 Pulley Ratio's (English Units)

Motor_Spd (RPM)	Motor Torque (in-oz.)	Power (HP)	Pulley Ratio (motor/brake)	Brake Torque (in-oz.)	Brake_Spd (RPM)	Time (sec)
0	144	0	4:1	36	0	cont.
2,125	240	0.5	4:1	60	8,500	cont.
3,750	268	1.0	4:1	67	15,000	cont.

Table 1: Speed, Torque & Power (English Units) 1:4 ratio

Motor_Spd (RPM)	Motor Torque (in-oz.)	Power (HP)	Pulley Ratio (motor/brake)	Brake Torque (in-oz.)	Brake_Spd (RPM)	Time (sec)
0	36	0	1:1	36	0	cont.
8,500	60	0.5	1:1	60	8,500	cont.
15,000*	67	1.0	1:1	67	15,000	cont.

Table 2: Speed, Torque & Power (English Units) 1:1 ratio

Motor_Spd (RPM)	Motor Torque (in-oz.)	Power (HP)	Pulley Ratio (motor/brake)	Brake Torque (in-oz.)	Brake_Spd (RPM)	Time (sec)
0	9	0	1:4	36	0	cont.
25,000*	12.38	0.31	1:4.28	53	5,841	cont.
25,000*	13.75	0.34	1:4	55	6,250	cont.

Table 3: Speed, Torque & Power (English Units) 4:1 ratio

The table is based on the performance graph for the MB-2.4 Brake, shown in Section 2.

* Maximum speed is limited to the physical speed limits of the pulleys and belt.

** See Table 7 for load cell specifications based on the number shown.

*** Torque required to overcome the air drag of brake at speed; does not account for bearing friction or belt losses.



3.2 Pulley Ratio's (SI Units)

Motor_Spd (RPM)	Motor Torque (Ncm)	Power (watts)	Pulley Ratio (motor/brake)	Brake Torque (Ncm)	Brake_Spd (RPM)	Time (sec)
0	102	0	4:1	25.4	0	cont.
2,125	169	373	4:1	42.4	8,500	cont.
3,750	189	746	4:1	47.3	15,000	cont.

Table 4: Speed, Torque & Power (SI Units) 4:1 Pulley Ratio

Motor_Spd (RPM)	Motor Torque (Ncm)	Power (watts)	Pulley Ratio (motor/brake)	Brake Torque (Ncm)	Brake_Spd (RPM)	Time (sec)
0	25.4	0	1:1	25.4	0	cont.
8,500	42.4	373	1:1	42.4	8,500	cont.
15,000*	47.3	746	1:1	47.3	15,000	cont.

Table 5: Speed, Torque & Power (SI Units) 1:1 Pulley Ratio

Motor_Spd (RPM)	Motor Torque (Ncm)	Power (watts)	Pulley Ratio (motor/brake)	Brake Torque (Ncm)	Brake_Spd (RPM)	Time (sec)
0	6.36	0	1:4	25.4	0	cont.
25,000*	8.74	224	1:4.28	35.0	5,833	cont.
25,000*	9.71	224	1:4	38.8	6,250	cont.

Table 6: Speed, Torque & Power (SI Units) 1:4 Pulley Ratio

The table is based on the performance graph for the MB-2.4 Brake, shown in Section 2.

* Maximum speed is limited to the physical speed limits of the pulleys and belt.

** See Table 7 for load cell specifications based on the number shown.

*** Torque required to overcome the air drag of brake at speed; does not account for bearing friction or belt losses.



3.3 Load Cell Sizes

The load cell(s) for the system may be specified by their load rating (column 2 or 3). Sections 5.1 & 5.2 has the data for the listed load cells.

Load Cell Ref. #	Load Rating (lbs.)	Load Rating (Kg.)	Arm (inches [cm])	Max Torque (in-lbs.)	Max Torque (in-oz.)	Max Torque (Ncm)
1	2.2	1	2 [5.08]	4.4	70.5	50
1	2.2	1	3 [7.62]	6.6	106	75
1	2.2	1	4 [10.16]	8.8	141	100
2	4.4	2	2 [5.08]	8.8	141	100
2	4.4	2	3 [7.62]	13.2	212	150
2	4.4	2	4 [10.16]	17.6	282	200
3	11	5	2 [5.08]	22	353	250
3	11	5	3 [7.62]	33	529	375
3	11	5	4 [10.16]	44	706	500
4	13	6	2 [5.08]	26.5	423	300
4	13	6	3 [7.62]	39.7	635	450
4	13	6	4 [10.16]	52.9	847	600

Table 7: Load Cell Reference

The following sections, 4 & 5, are the specifications for the different types of load cells.


4. LOAD CELLS (DB6B-2.4-FM, MEASURING BRAKE TORQUE)

Load Cell Load Rating.....	70.5 oz. (2 kg)
Arm Length	1.75 inches (4.445 cm)
Rated torque of Load Cell	123.4 in-oz. (87.2 Ncm)
Safe Overload torque of Load Cell	185.2 in-oz. (130.8 Ncm)
Max Brake Torque.....	67 in-oz. (47.3 Ncm)
Max Torque to Load Cell	67 in-oz. (47.3 Ncm)
Non-Linearity.....	0.02% of Rated Output (R.O.)
Hysteresis.....	0.02% of R.O.
Non-Repeatability.....	0.02% of R.O.
Zero Balance.....	±5% of R.O.
Compensated Temperature Range	14°F to 104°F
Safe Temperature Range.....	14°F to 140°F
Temperature Effect on Output.....	0.002% of Load/°F
Temperature Effect on Zero.....	0.002% of Load/°F
Safe Overload	150% of R.O.*

* Hard stops are in place to help prevent damage from over-load.



4.1 Brake Load Cell Accuracy Plot (in-oz.) – Linear

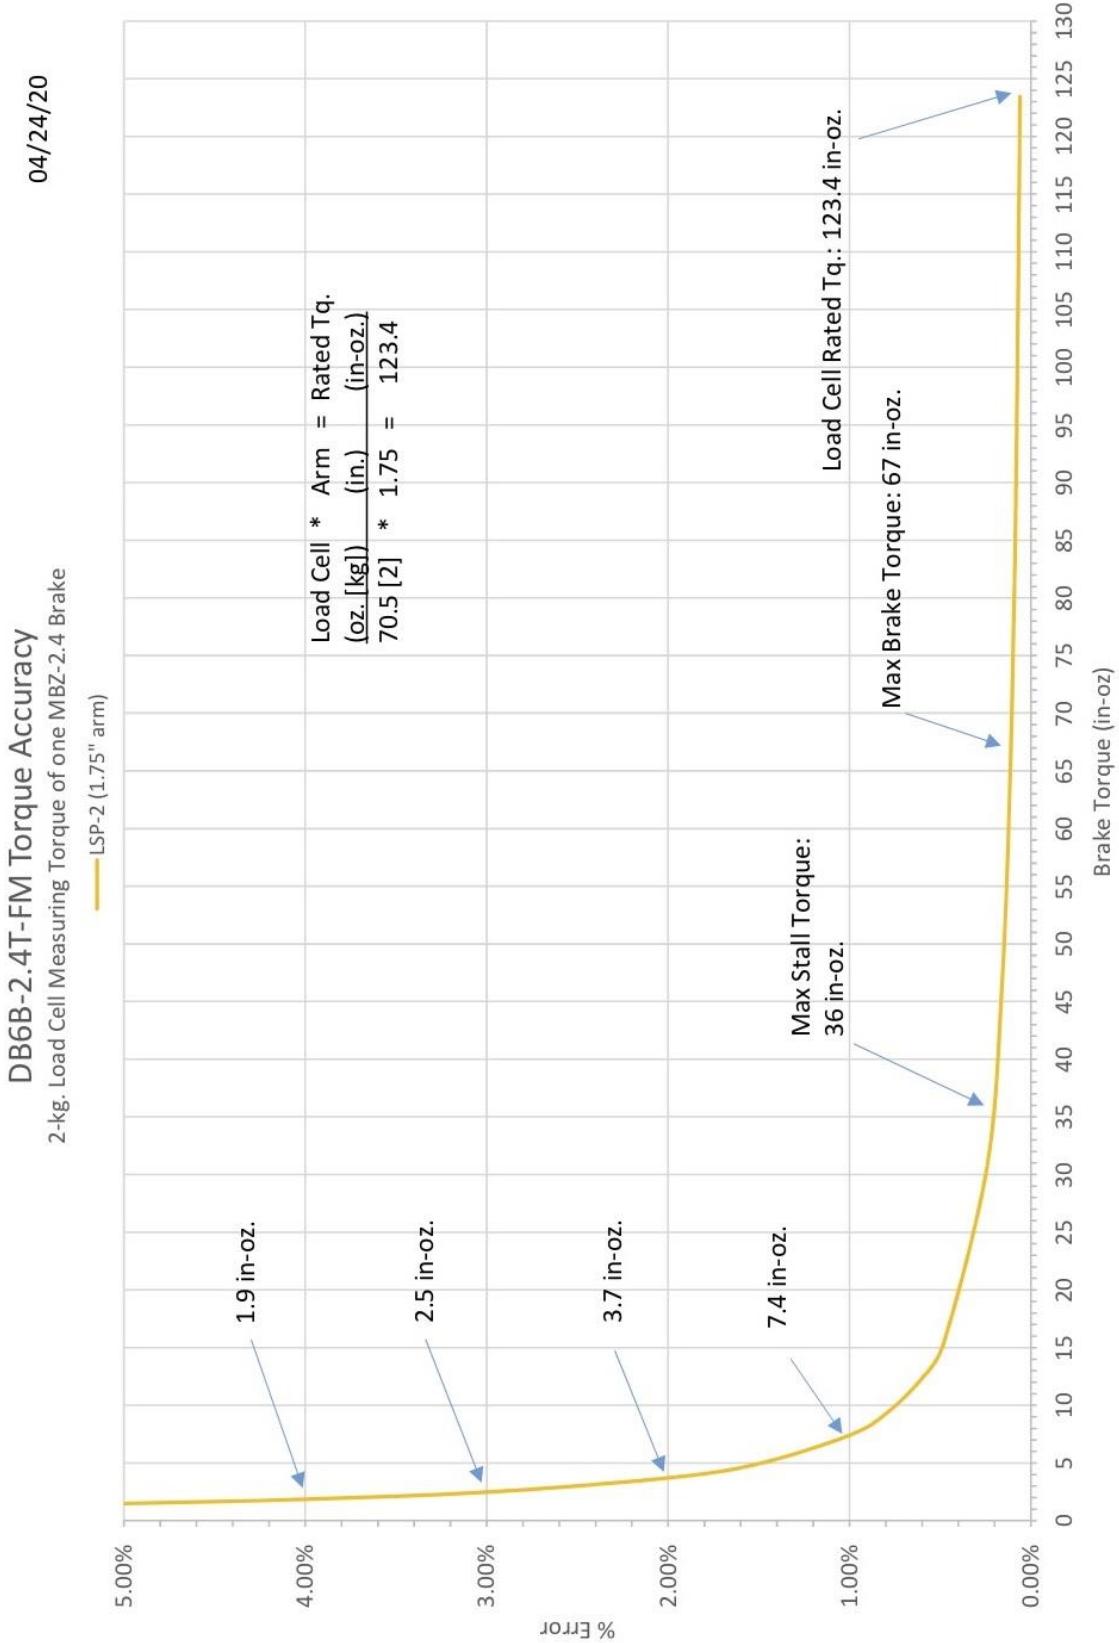




4.2 Brake Load Cell Accuracy Plot (N-cm) – Linear

04/24/20

DB6B-2.4T-FM Torque Accuracy

2-kg. Load Cell Measuring Torque of one MBZ-2.4 Brake

— LSP-2 (1.75" arm)

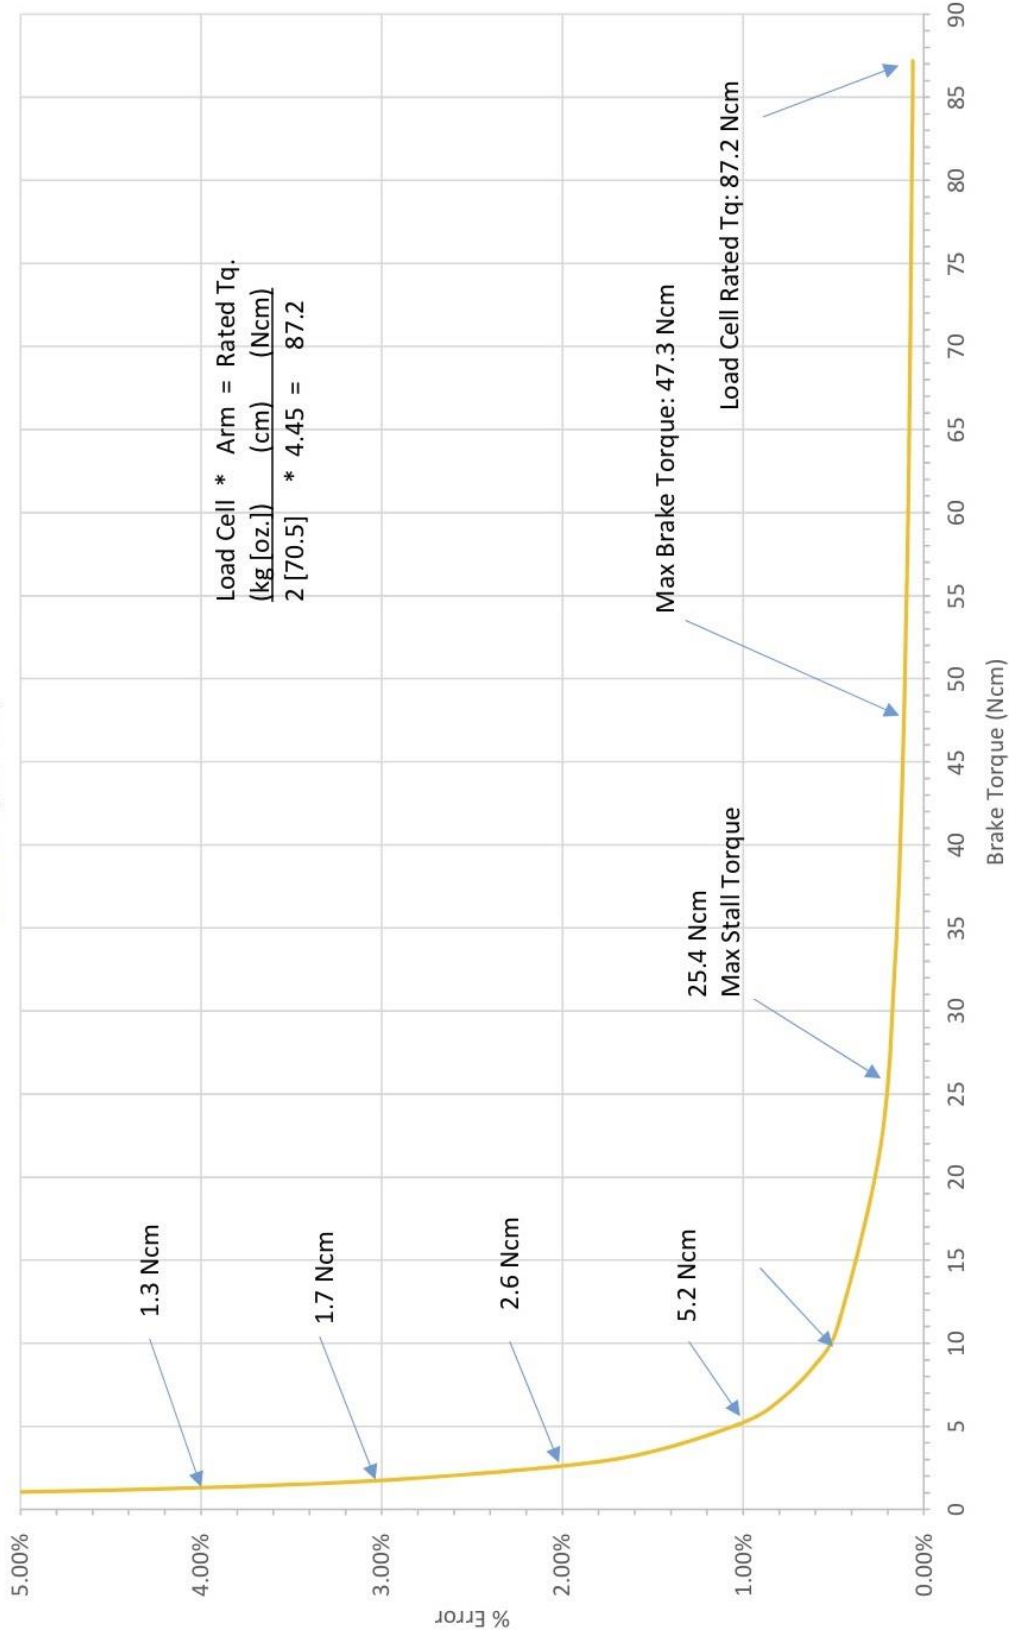

$$\text{Load Cell} * \text{Arm} = \text{Rated Tq.}$$

$$\frac{(\text{kg [oz.]})}{2} \frac{(\text{cm})}{[70.5]} * 4.45 = 87.2$$



5. LOAD CELLS (DB6M-2.4T-FM, MEASURING MOTOR TORQUE):

For section 5.1 & 5.2, reference Table 7, in section 3.3 Load Cell Sizes.

5.1 Load Cell #'s 1 through 3.

Load Cell Load Rating	35.3 oz. (1 kg)
Safe Overload	150% of R.O.*
Non-Linearity	0.02% of Rated Output (R.O.)
Hysteresis	0.02% of R.O.
Non-Repeatability.....	0.02% of R.O.
Zero Balance	±5% of R.O.
Compensated Temperature Range	14°F to 104°F
Safe Temperature Range	14°F to 140°F
Temperature Effect on Output	0.002% of Load/°F
Temperature Effect on Zero.....	0.002% of Load/°F

5.2 Load Cell #4.

Load Cell Load Rating	212 oz. (6 kg)
Safe Overload	150% of R.O.*
Non-Linearity	0.02% of Rated Output (R.O.)
Hysteresis	0.02% of R.O.
Non-Repeatability.....	0.02% of R.O.
Zero Balance	±1% mV/V
Compensated Temperature Range	14°F to 104°F
Safe Temperature Range	14°F to 140°F
Temperature Effect on Output	0.002% of Load/°F
Temperature Effect on Zero.....	0.002% of Load/°F

* Hard stops are in place to help prevent damage from over-load.

The Torque Accuracy plots to follow show the percentage error as a function of measured torque. These plots show the range that the load cell selected will accurately measure. Plots are shown on a linear scale and, for clarity, on a logarithmic scale. The maximum torque to the motor is based on the pulley ratio selected for belt coupled systems. The accuracy plots are based on published data from the load cell vendor.




5.3 Load Cell Accuracy Plot (in-oz.) - Linear

9/5/19


DB6M-2.4 Torque Accuracy

Various. Load Cells measuring Motor Torque w/ variable arm

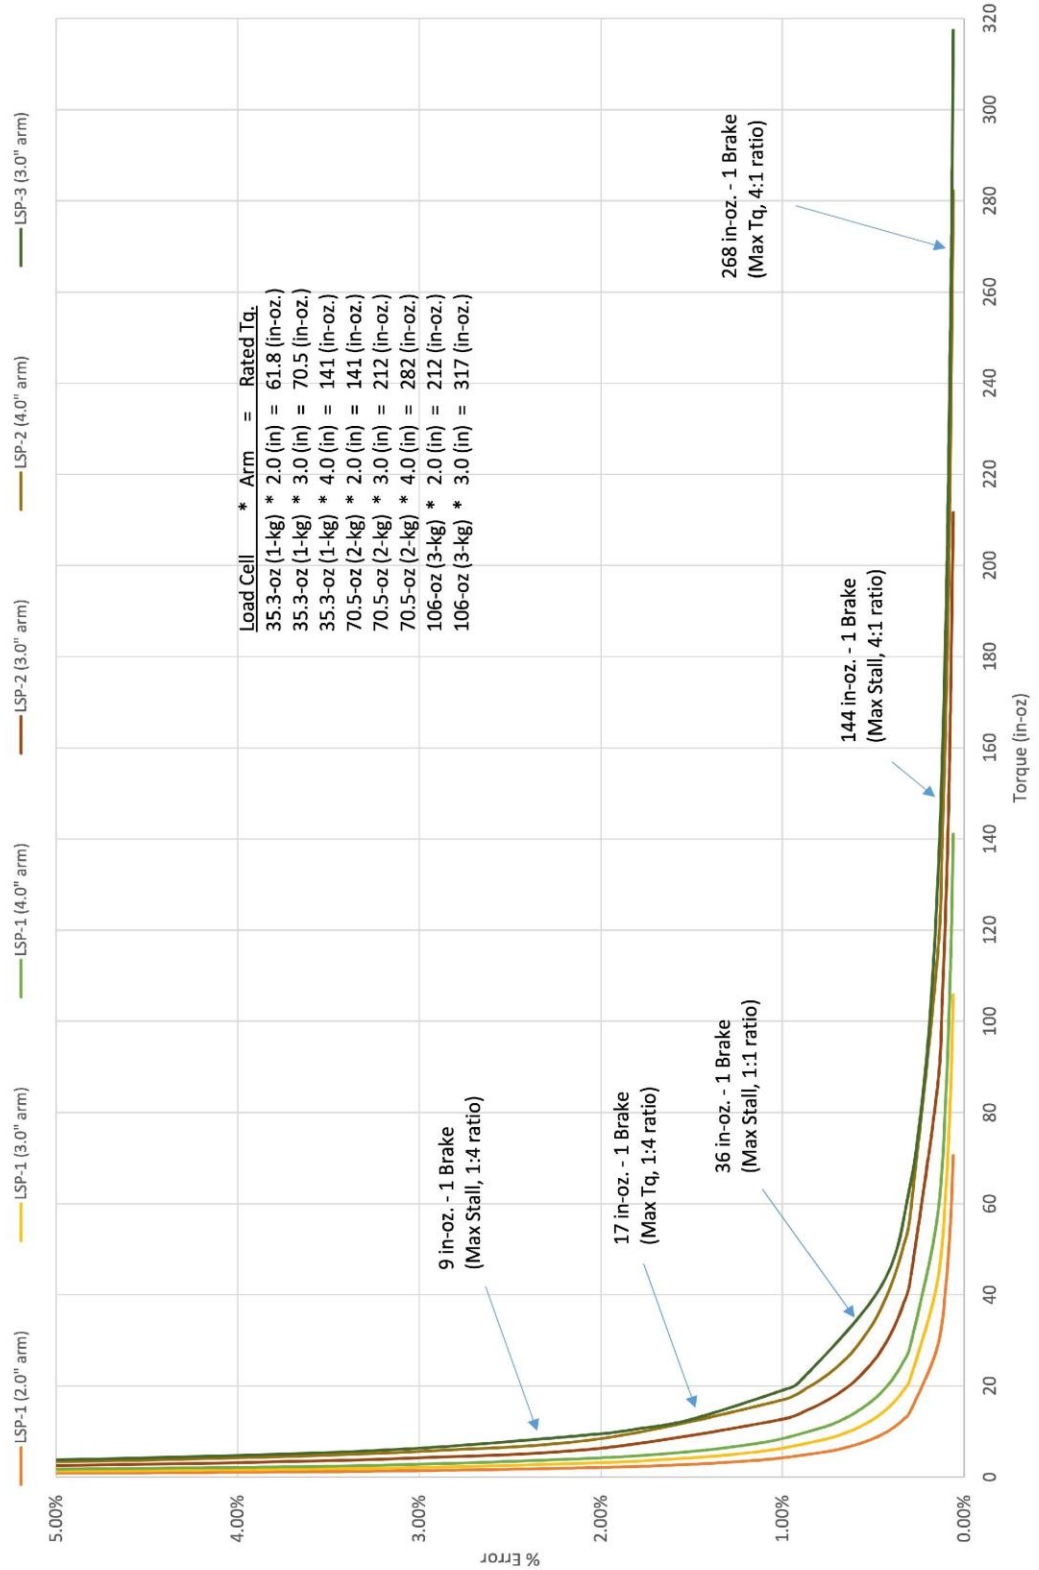




5.4 Load Cell Accuracy Plot (in-oz.) – Logarithmic

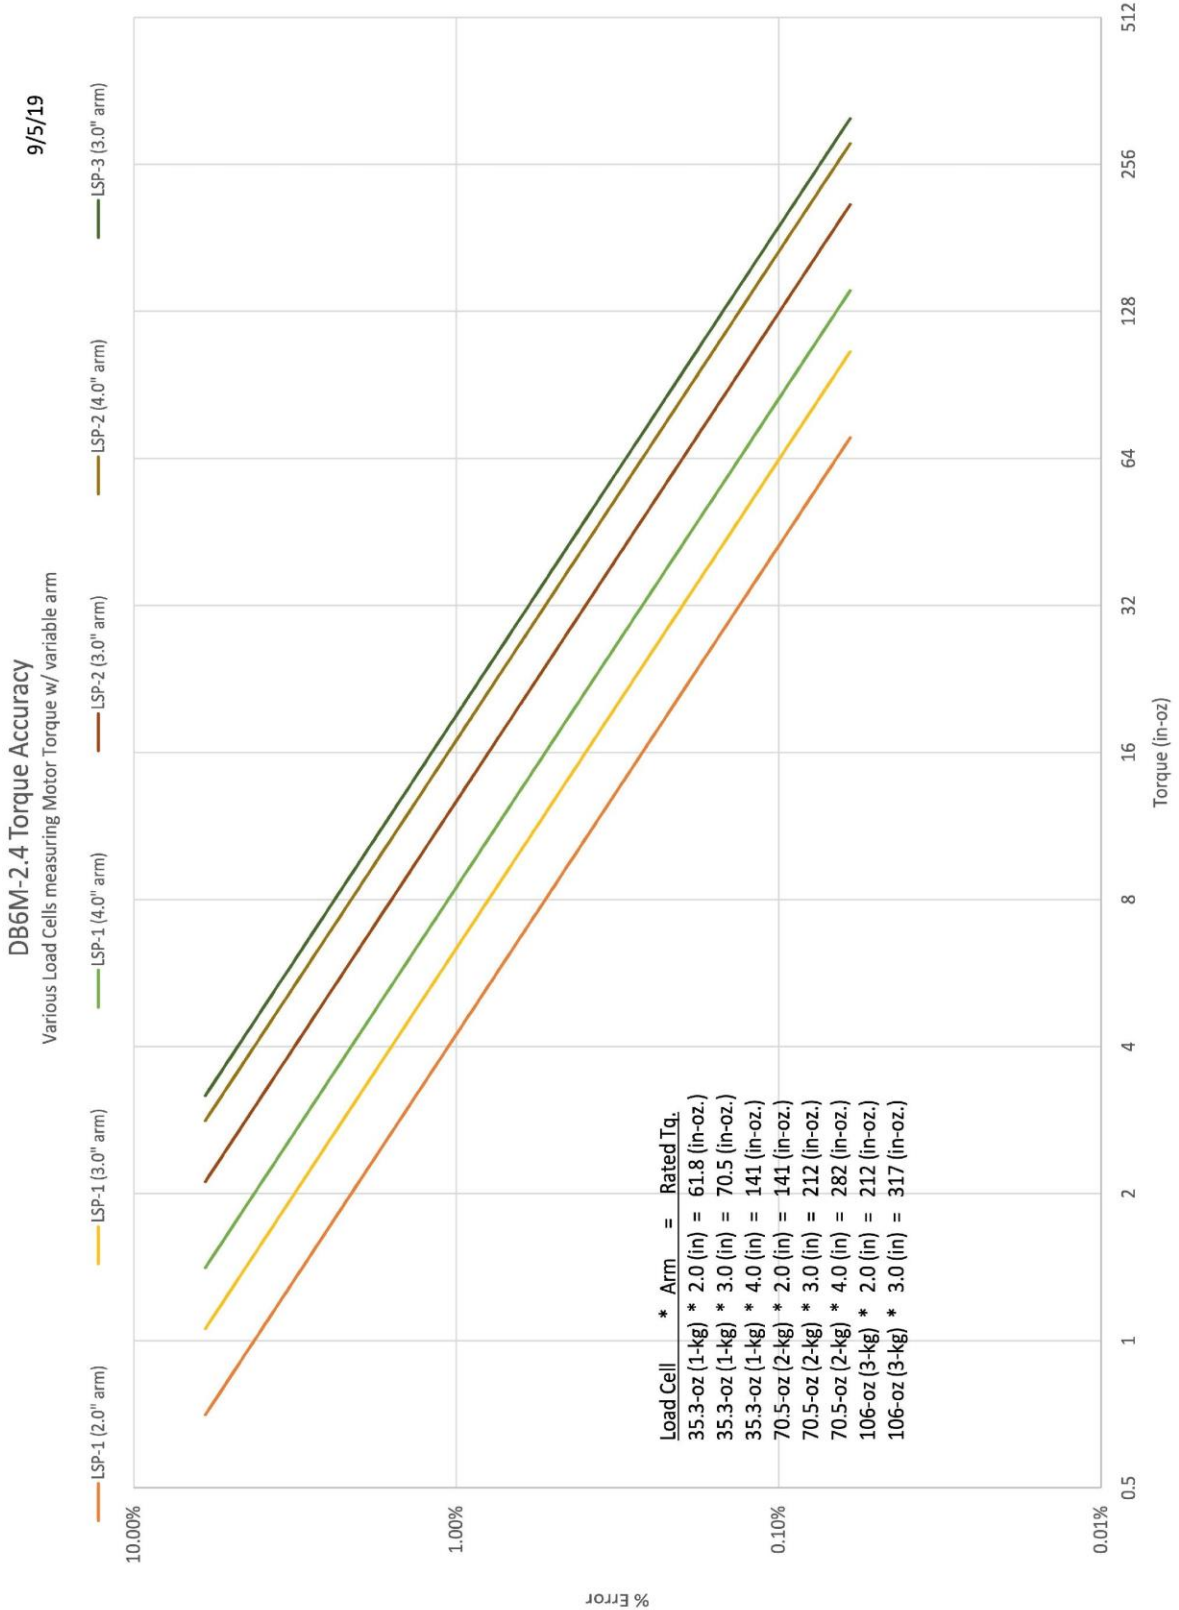



5.5 Load Cell Accuracy Plot (Ncm) – Linear

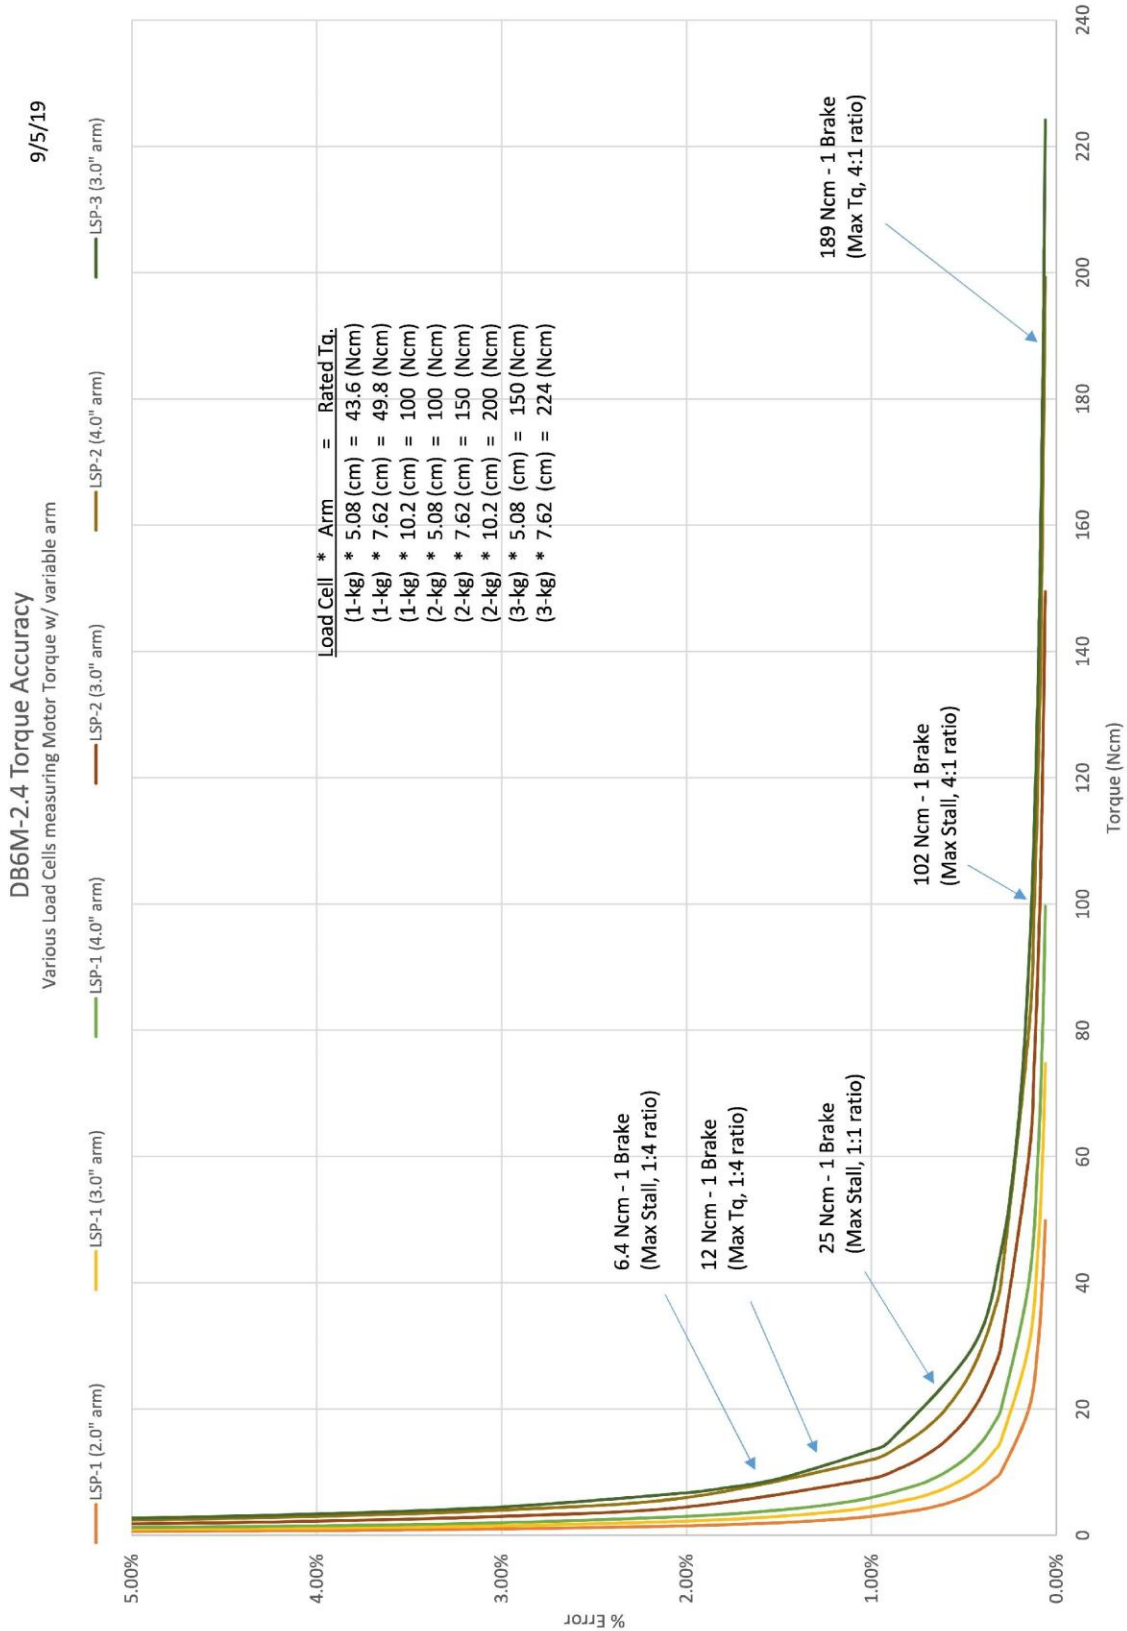




5.6 Load Cell Accuracy Plot (Ncm.) – Logarithmic

9/5/19

DB6M-2.4 Torque Accuracy

Various Load Cells measuring Motor Torque w/ variable arm

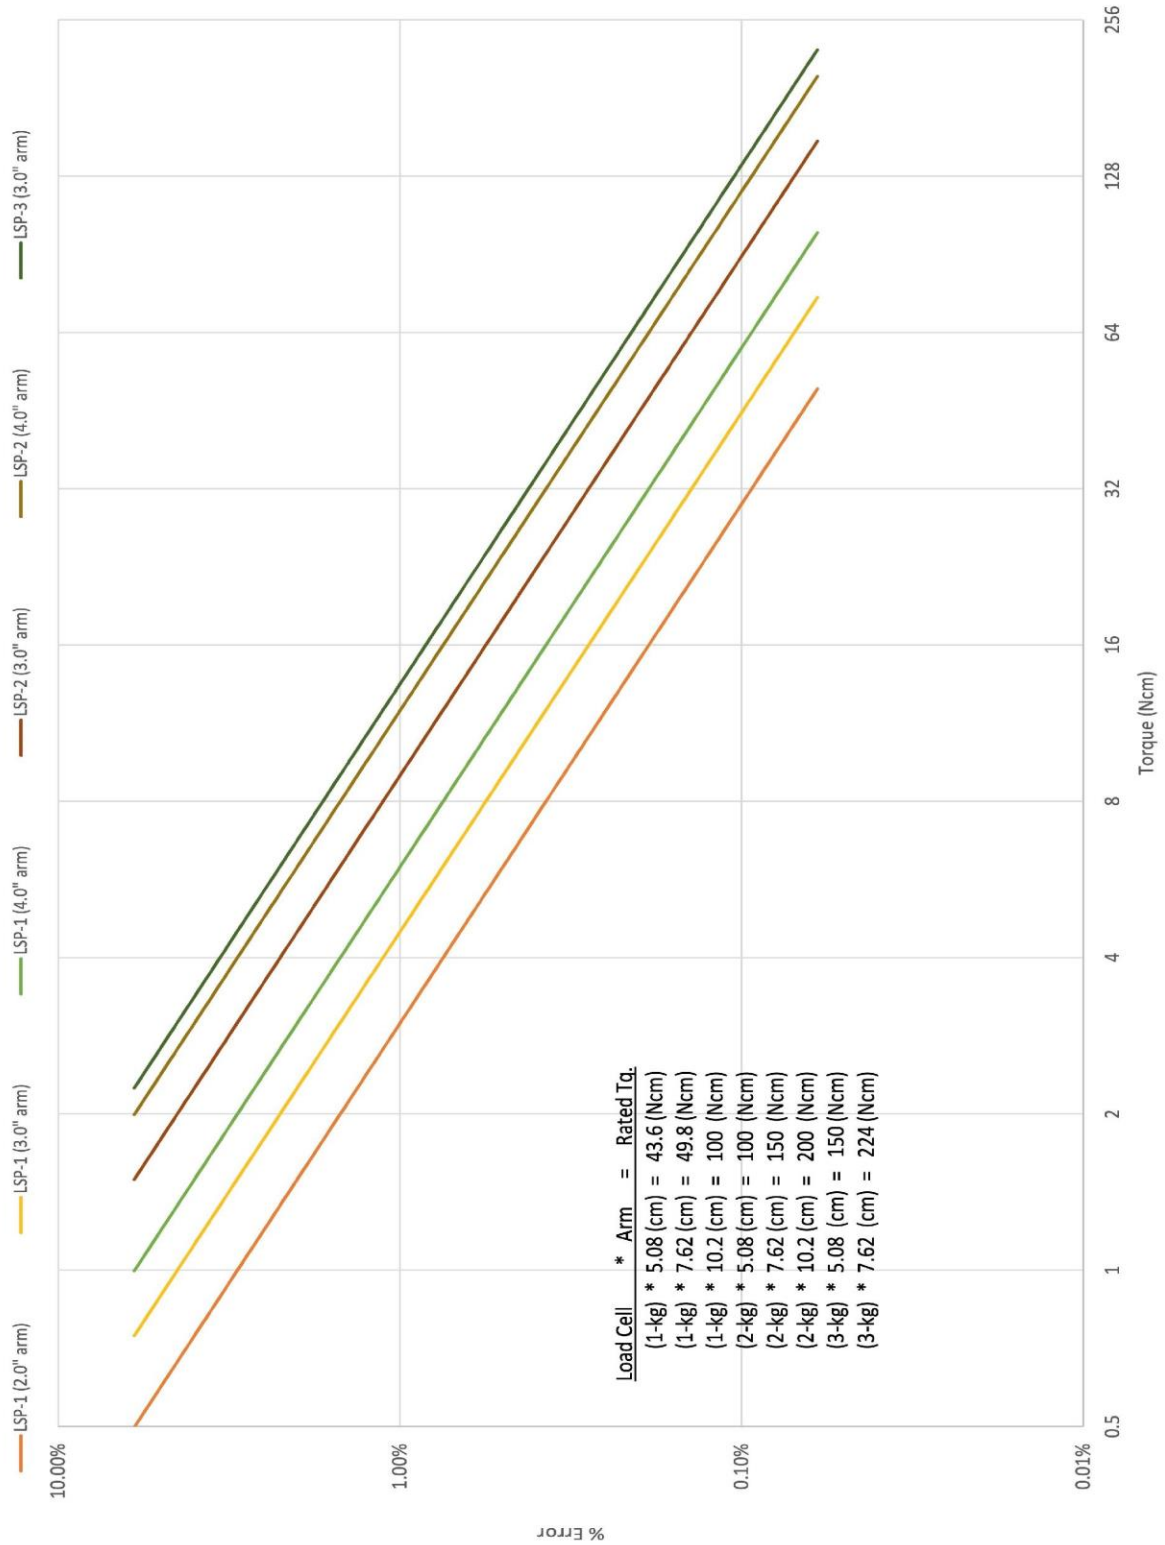



6. SPEED

A standard brake has five magnets (alternative quantity are optional) which trigger a hall effect sensor. The speed is averaged over one revolution of the brake. A 48-MHZ clock is used to measure the time between magnets.

Parameter	Conditions	Min.	Typ.	Max.	Units
Clock Error	~25°C			±30	PPM
	-10°C to 60°C			±50	PPM
	-40°C to 85°C			±100	PPM
Brake Speed	5 magnets	12	180*		KPM
	30 magnets	2	30*		KPM

* Theoretical speed; actual maximum speed is limited to the speed of the brake.

7. SAMPLING

Sampling is the frequency of measuring and recording data; this rate is adjustable by the operator.

Parameter	Conditions	Min.	Typ.	Max.	Units
Sampling Rate	2.3 GHz	Proc.	20	50	- ms

i.e. 50 ms = 20 samples (or readings) per second.

8. LAPTOP COMPUTER

Parameter	Conditions	Min.	Typ.	Max.	Units
Processor		2.3	GHz		
Memory		8	GB		
Display	LED LCD		15.6		inches

9. POWER REQUIREMENTS

The MBS Dynamometer requires two 115 or 230 VAC power outlets: one for the laptop computer and one for the controller. The brakes in the dynamometer structure receive power from the controller. The AC power supplies the power supplies and cooling fan in the controller; everything else is 24 VDC (or less) in the system.

Item	Voltage	Type	Current (amps)	Freq. (Hz)	# Plugs
Controller	115/230	VAC	1.1/0.6	50/60	1
Laptop	110-240	VAC	1.2	50/60	1
Dynamometer	24	VDC	6.0	-	none



10. DC VOLTAGE TRANSDUCERS

10.1 Input

Range.....	0 VDC to: 1, 5, 10, 50, 150, 200 up to 600 VDC
Overload.....	2x voltage range selected
Frequency Range.....	DC only

10.2 Output

Basic Accuracy.....	1.0%
Linearity.....	10% to 100% F.S.
Calibration.....	True RMS sensing
Thermal Drift.....	500 PPM/°C
Response Time.....	250 ms

10.3 Environmental and Physical Characteristics

Operating Temperature.....	0°C to +50°C
Insulation Category.....	CAT II
Vibration Tested to	IEC 60068-2-6, 1995
Pollution Degree.....	2
Altitude.....	2000-meter max.
Insulation Voltage.....	2500 VDC
MTBF.....	Greater than 100K hours
Relative Humidity.....	5% to 95%, non-condensing
Weight.....	0.5 lbs.

11. AC VOLTAGE TRANSDUCERS – SINGLE PHASE

11.1 Input

Range.....	0 VAC to: 50, 150, 250, 500, 600 VAC
Overload.....	2x voltage range selected
Frequency Range.....	20 Hz to 5 kHz

11.2 Output

Basic Accuracy.....	0.5%
Linearity.....	10% to 100% F.S.
Calibration.....	True RMS sensing
Thermal Drift.....	500 PPM/°C
Response Time.....	250 ms

11.3 Environmental and Physical Characteristics

Operating Temperature.....	0°C to +60°C
Insulation Category.....	CAT II
Vibration Tested to	IEC 60068-2-6, 1995
Pollution Degree.....	2
Altitude.....	2000-meter max.
Insulation Voltage.....	2500 VDC
MTBF.....	Greater than 100K hours
Relative Humidity.....	5% to 95%, non-condensing
Weight.....	0.5 lbs.



12. DC CURRENT TRANSDUCERS (Split Core)

12.1 Input

Range.....	0 ADC to: 2, 5, 10, 20, 30, 50, 75, 100, 150 up to 600 ADC
Overload.....	4x current range selected
Frequency Range.....	DC only

12.2 Output

Basic Accuracy.....	1.0%
Linearity.....	10% to 100% F.S.
Thermal Drift.....	500 PPM/°C
Response Time.....	250 ms

12.3 Environmental and Physical Characteristics

Operating Temperature.....	0°C to +50°C
Insulation Category.....	CAT II
Vibration Tested to	IEC 60068-2-6, 1995
Pollution Degree.....	2
Altitude.....	2000-meter max.
Insulation Voltage.....	2500 VDC
MTBF.....	Greater than 100K hours
Relative Humidity.....	5% to 95%, non-condensing
Weight.....	0.5 lbs.

13. AC CURRENT TRANSDUCERS – SINGLE PHASE (Split Core)

13.1 Input

Range.....	0 AAC to: 5, 10, 15, 20, 25, 30, 40, 50, 75, 100, 150 up to 600 AAC
Overload.....	4x current range selected
Frequency Range.....	20 Hz to 5 kHz

13.2 Output

Basic Accuracy.....	0.5%
Linearity.....	10% to 100% F.S.
Calibration.....	True RMS sensing
Thermal Drift.....	500 PPM/°C
Response Time.....	250 ms


13.3 Environmental and Physical Characteristics

Operating Temperature.....	0°C to +60°C
Insulation Category.....	CAT II
Vibration Tested to	IEC 60068-2-6, 1995
Pollution Degree.....	2
Altitude.....	2000-meter max.
Insulation Voltage.....	2500 VDC
MTBF.....	Greater than 100K hours
Relative Humidity.....	5% to 95%, non-condensing
Weight.....	0.5 lbs.



MAGNETIC BRAKE SYSTEMS

14. DYNAMOMETER LAYOUT – LOAD CELL ON BRAKE

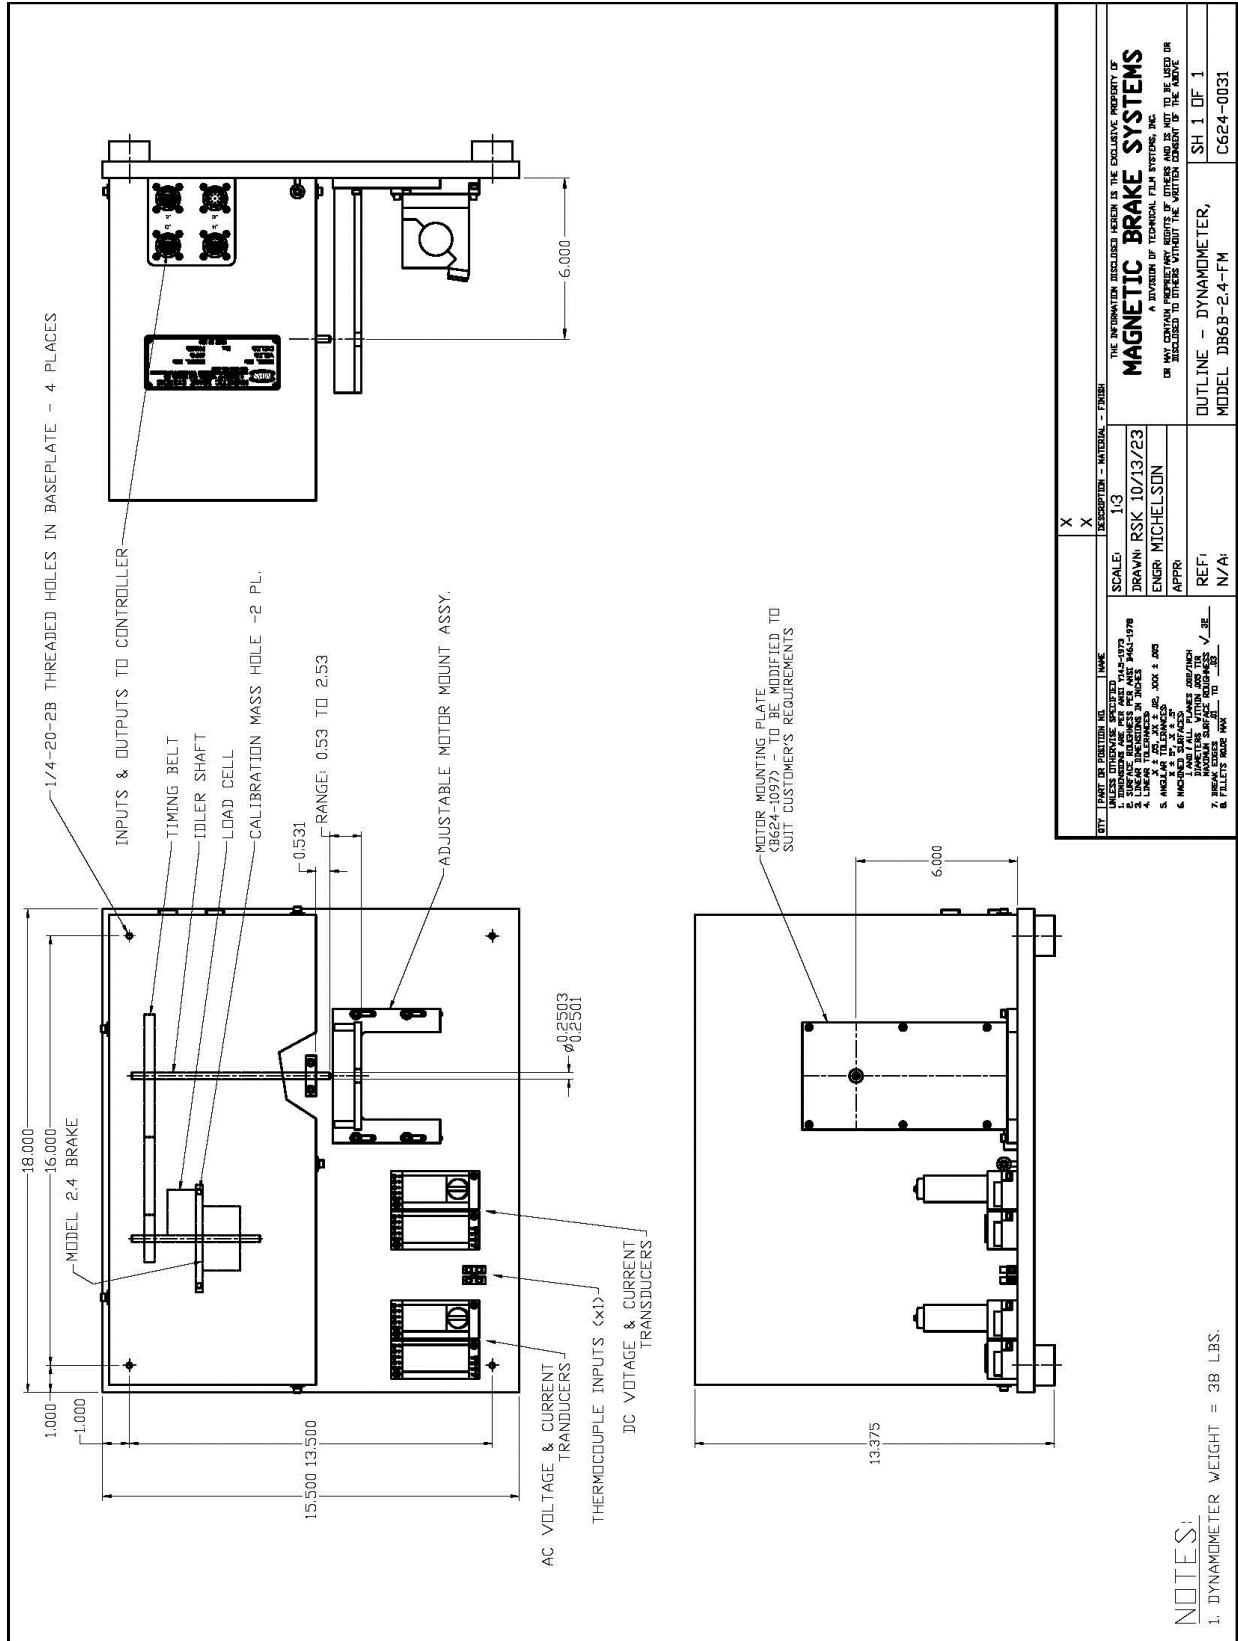


UNLESS OTHERWISE SPECIFIED: 1. DIMENSIONS ARE IN INCHES 2. SURFACE FINISHES PER ASST 3441-1978 3. LINEAR TOLERANCES IN THOUS. 4. ANGLES IN DEGREES 5. HOLE AS TOLERANCES 6. MACHINED SURFACES 7. DIMENSIONS WITHIN 0.001 INCH 8. FINISHES TO 100 9. FILETS R0.031	SCALE: 1:1 DRAWN: RSK 10/13/23 ENGR: MICHELSDIN APPR:	DESCRIPTION - MATERIAL - FINISH X X
THE INFORMATION DEPICTED HEREIN IS THE EXCLUSIVE PROPERTY OF MAGNETIC BRAKE SYSTEMS A DIVISION OF TECHNICAL FLUID SYSTEMS, INC. OR MAY CONTAIN PROPRIETARY RIGHTS OF OTHERS AND IS NOT TO BE USED OR REPRODUCED TO OTHERS WITHOUT THE WRITTEN CONSENT OF THE ABOVE	REF1 N/A	SH 1 DF 1 CG24-0031
OUTLINE -- DYNAMOMETER, MODEL DBGB-2.4-FM		

NOTES:
1. DYNAMOMETER WEIGHT = 38 LBS.



MAGNETIC BRAKE SYSTEMS

15. MOTOR MOUNTING PLATE – FACE MOUNT (DB6B)

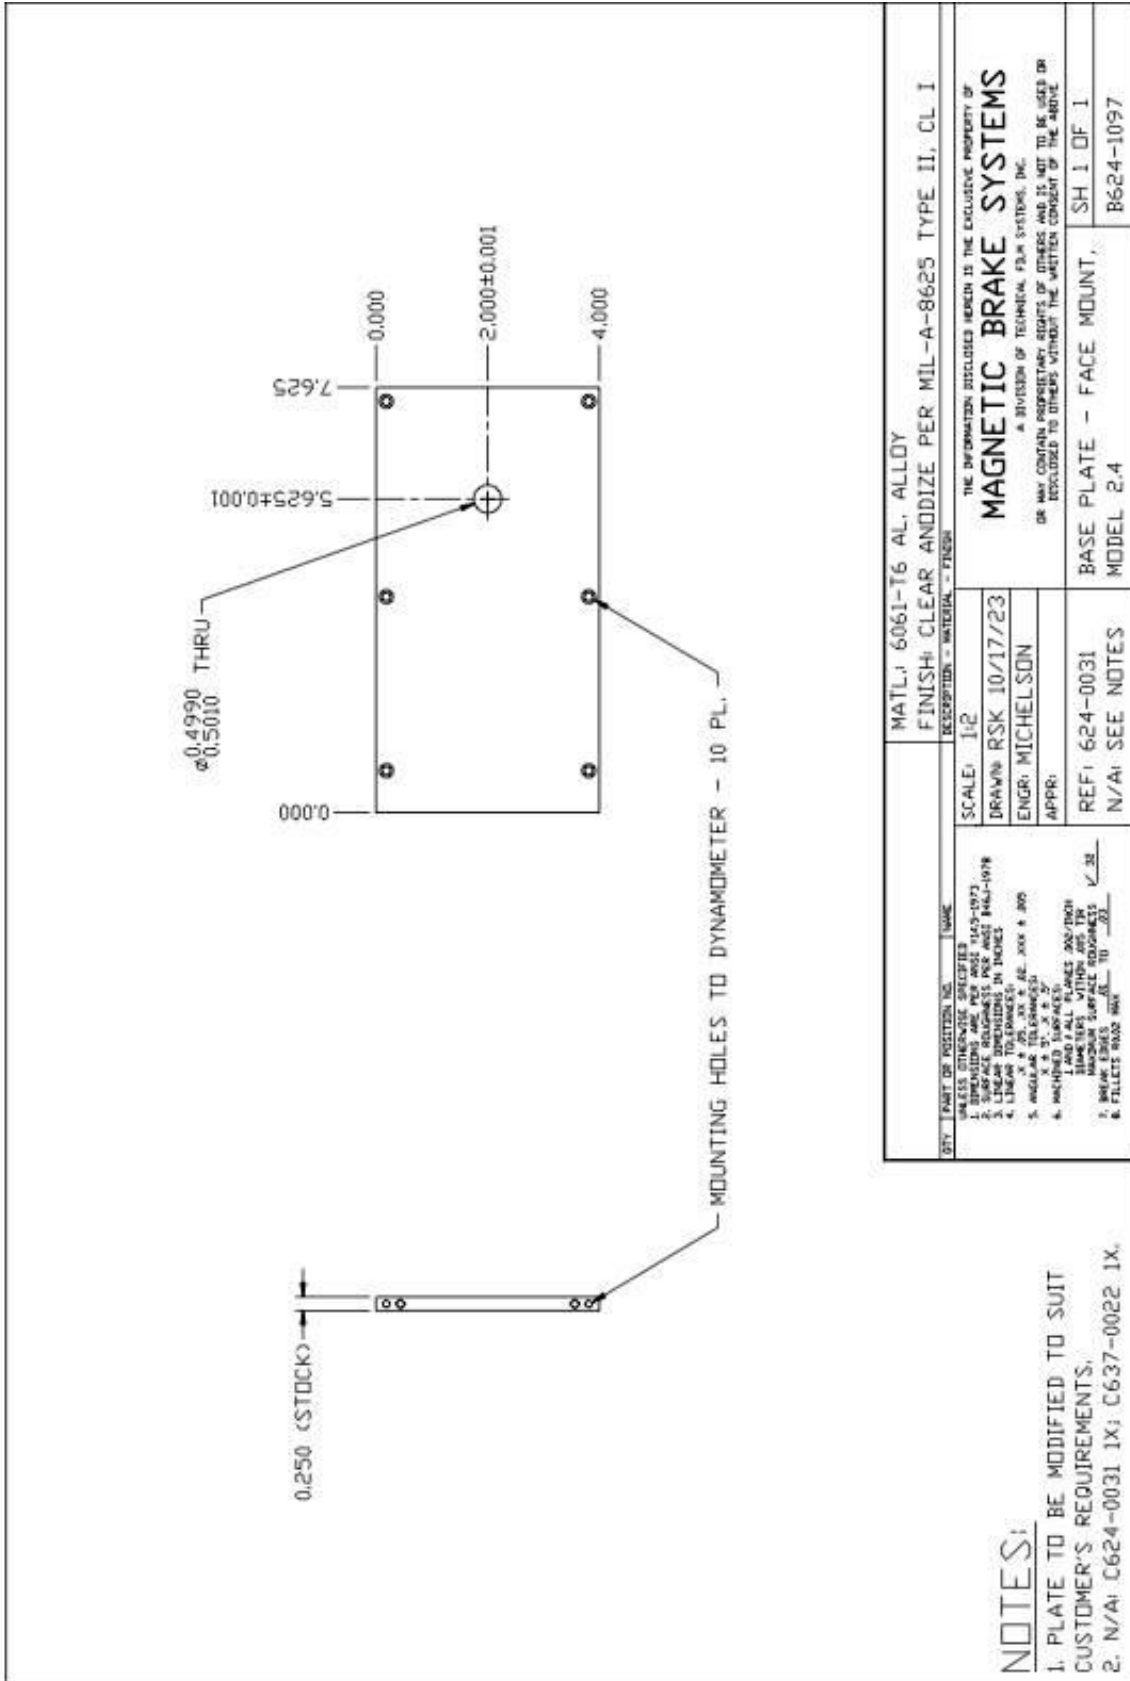

NOTES:


1. PLATE TO BE MODIFIED TO SUIT CUSTOMER'S REQUIREMENTS.
2. N/A: C624-0031 1X; C637-0022 1X.

QTY	PART OR POSITION NO.	NAME	MATL: 6061-T6 AL. ALLOY FINISH: CLEAR ANODIZE PER MIL-A-8625 TYPE II, CL I
UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS ARE PER ASST 1103-1073 2. DIMENSIONS ARE PER ASST 1101-1078 3. LINEAR DIMENSIONS IN INCHES 4. LINEAR DIMENSIONS IN MILLIMETERS 5. ANGLES 2° 30', 45', 60', 90', 120', 135', 150', 180' 6. MACHINED SURFACES: X & Y: .001 & .001 Z: .002 7. SHARP EDGES 8. FILLETS: R0.025 MIN			DESCRIPTION - MATERIAL - FINISH
SCALE: 1:2	DRAWN: RSK 10/17/23	ENGR: MICHELSON	THE INFORMATION DISCLOSED HEREIN IS THE EXCLUSIVE PROPERTY OF MAGNETIC BRAKE SYSTEMS A DIVISION OF TECHNICAL FILM SYSTEMS, INC. OR MAY CONTAIN PROPRIETARY RIGHTS OF OTHERS AND IS NOT TO BE USED OR DISCLOSED TO OTHERS WITHOUT THE WRITTEN CONSENT OF THE ABOVE.
REF: 624-0031	N/A: SEE NOTES	BASE PLATE – FACE MOUNT, MODEL 2.4	SH 1 DF 1 B624-1097



MAGNETIC BRAKE SYSTEMS


16. DYNAMOMETER LAYOUT – L.C. ON MOTOR (OPTION 1 FACE MOUNT)

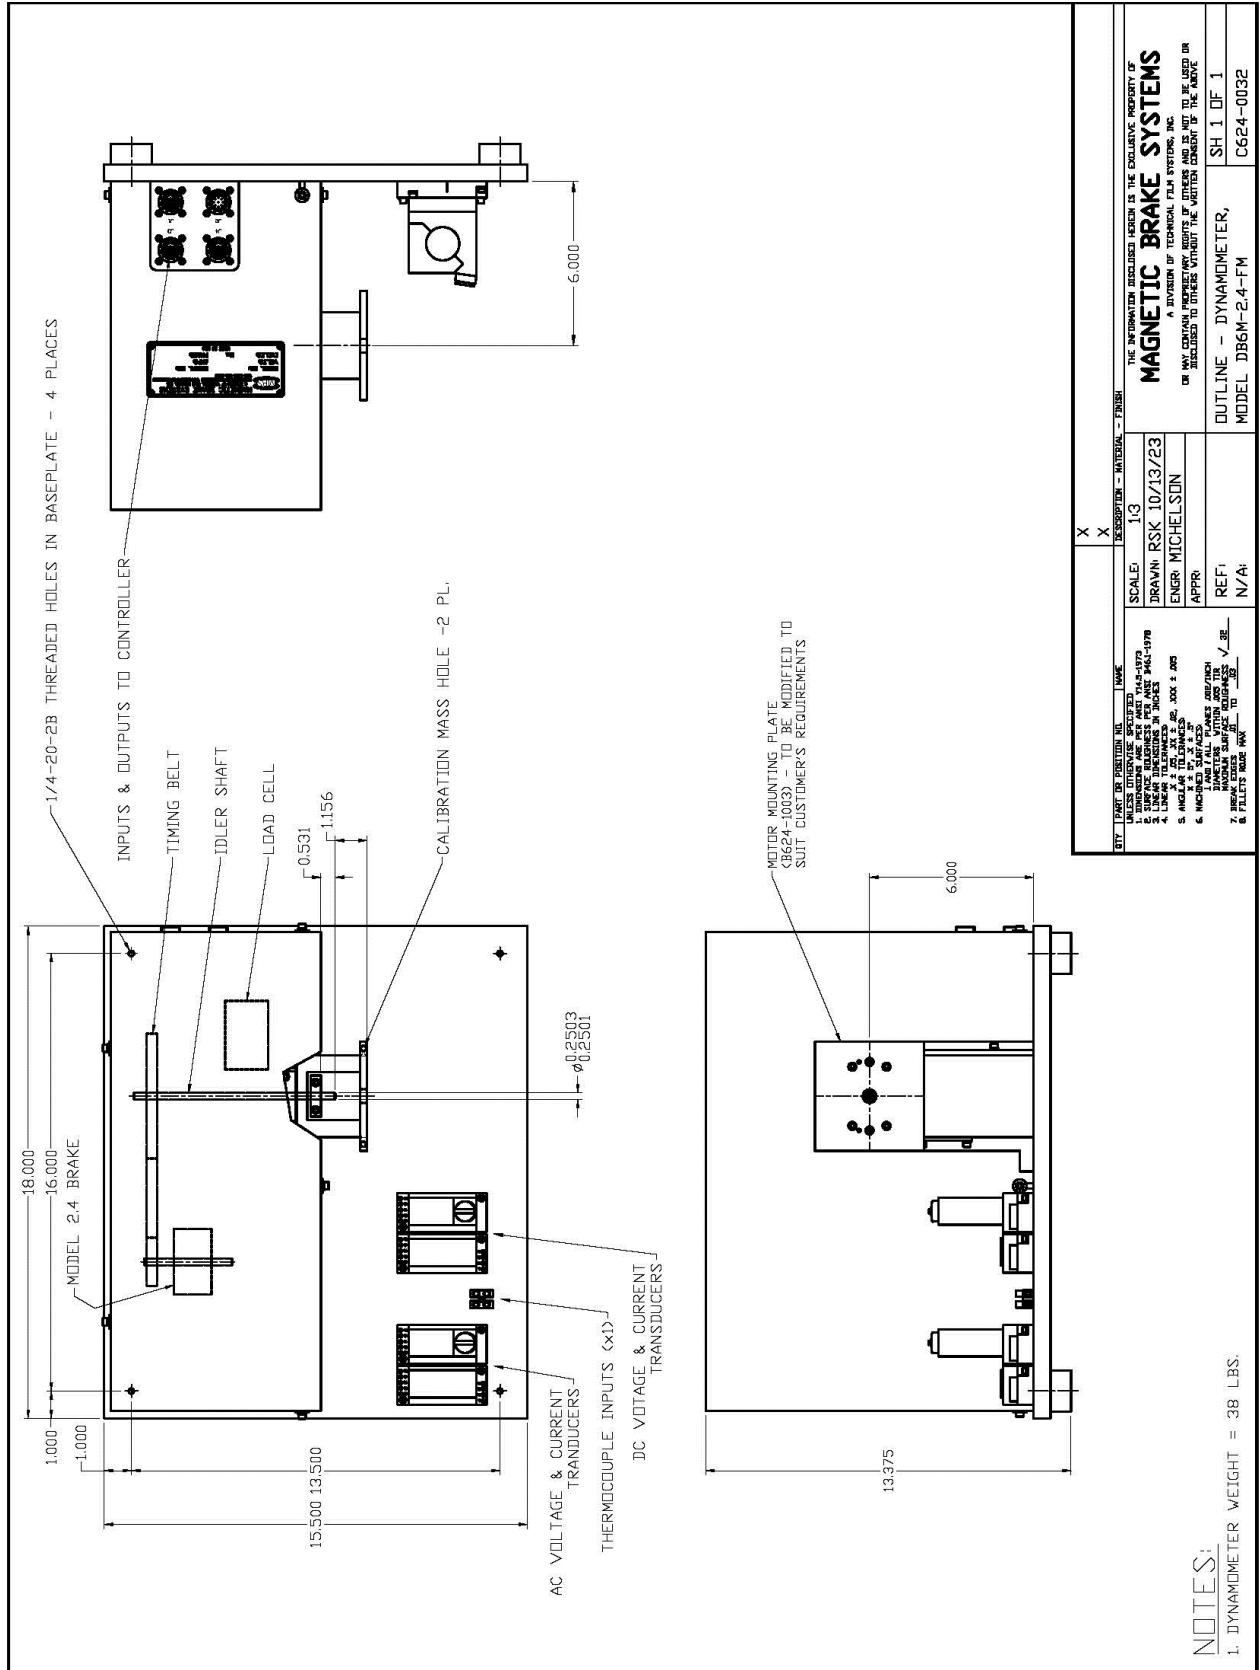



MAGNETIC BRAKE SYSTEMS


17. MOTOR MOUNTING PLATE – FACE MOUNT (DB6M)

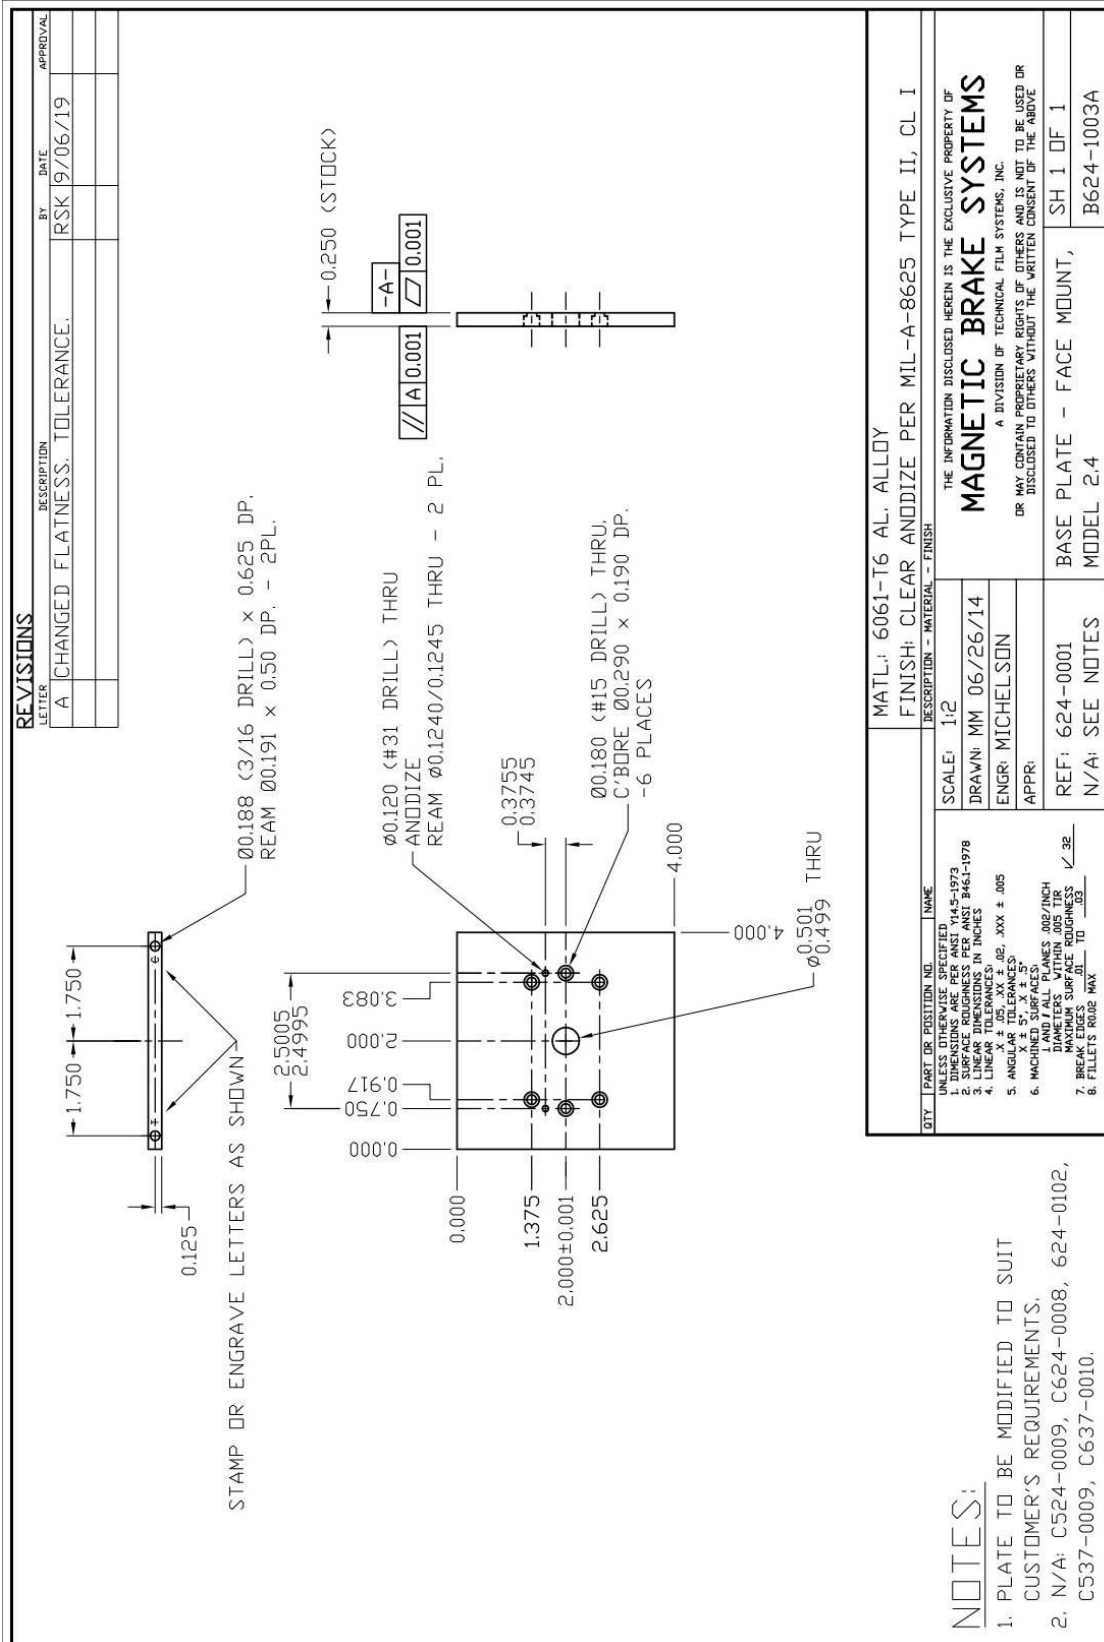



MAGNETIC BRAKE SYSTEMS

18. DYNAMOMETER LAYOUT – L. C. ON MOTOR (OPTION 2 BASE MOUNT)

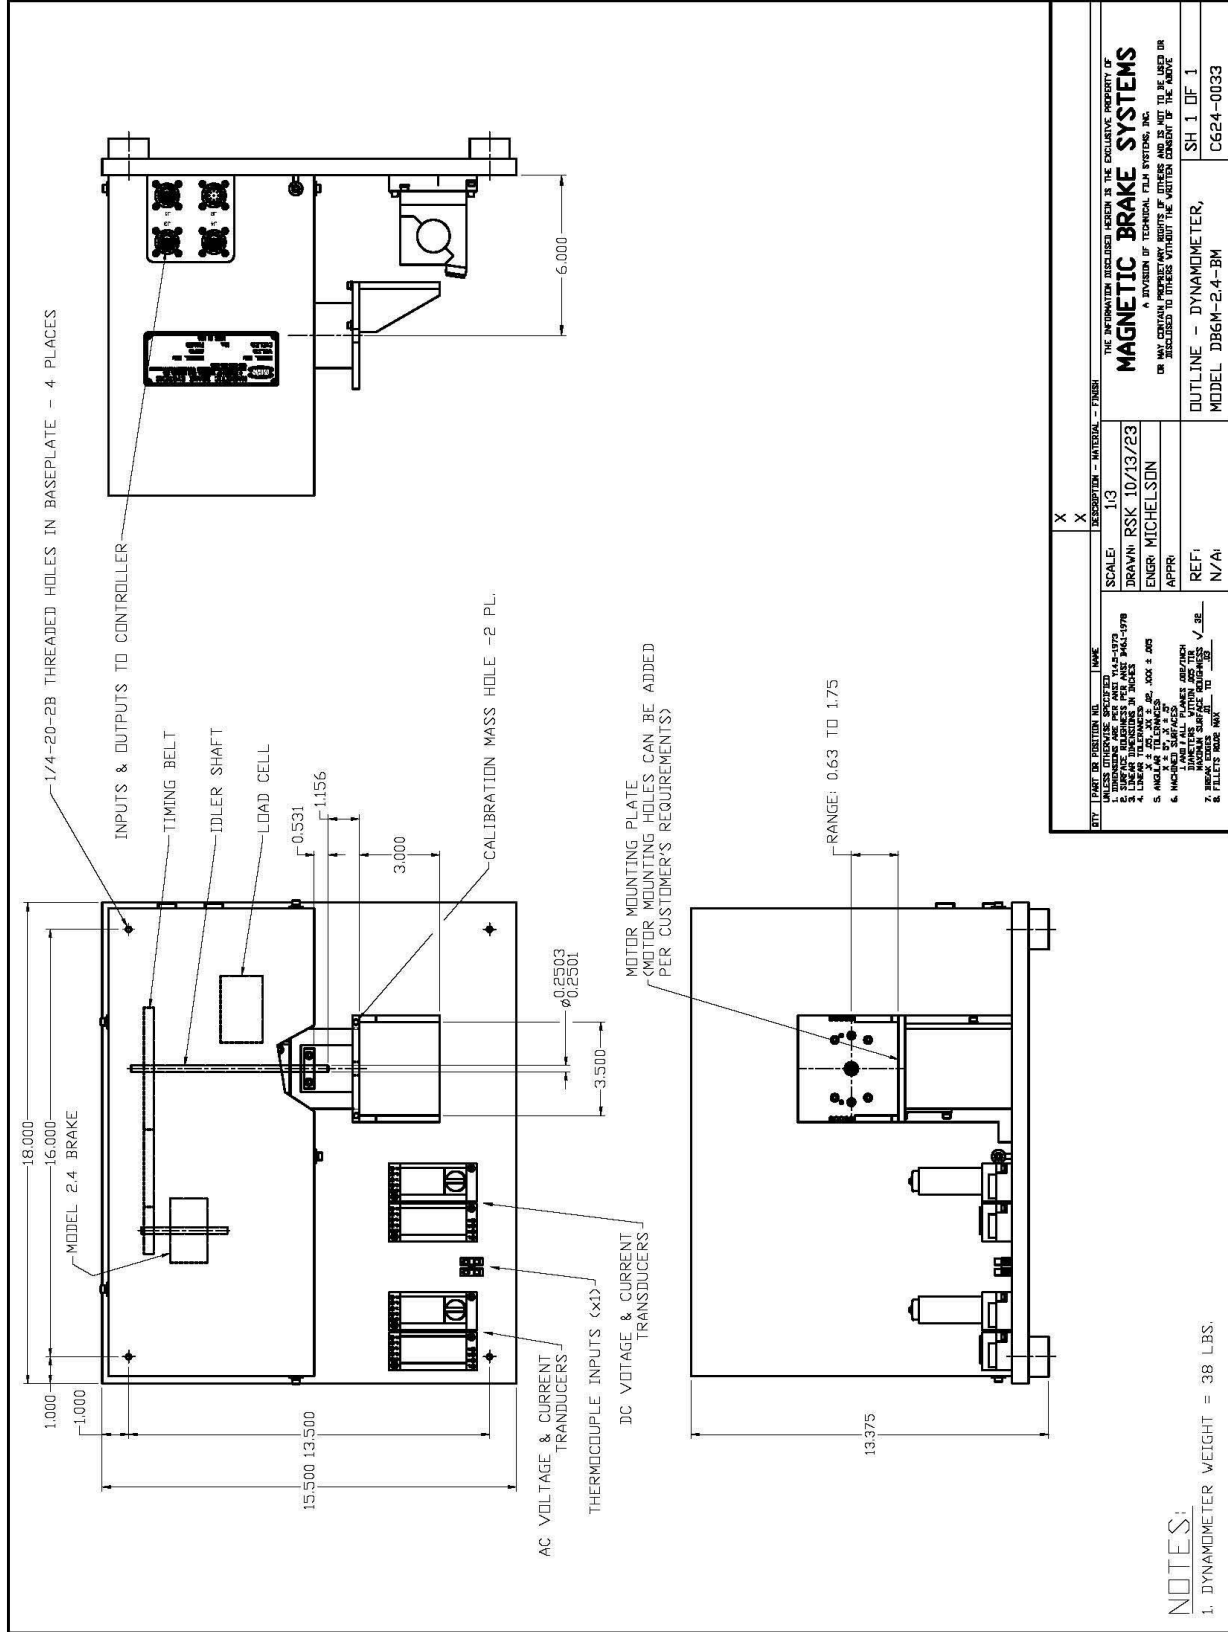

CITY		STATE		COUNTRY	
X		X		X	
THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF MAGNETIC BRAKE SYSTEMS A DIVISION OF TECHNICAL FILM SYSTEMS, INC. OR MAY BE THE PROPERTY OF OTHERS AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION OF THE ABOVE.					
SCALE: 1:3		DRAWN: RSK 10/13/23		ENGR: MICHELSON	
APPRO: [Signature]		REF: N/A		MODEL DB6M-2.4-BM	
OUTLINE - DYNAMOMETER,		SH 1 OF 1		C624-0033	

NOTES:
1. DYNAMOMETER WEIGHT = 38 LBS.



MAGNETIC BRAKE SYSTEMS

19. MOTOR MOUNTING PLATE – BASE MOUNT (DB6M)

REVISIONS	LETTER	DESCRIPTION	BY	DATE	APPROVAL
	A	X		XX/XX/XX	

HEIGHT ADJUSTABLE BASE MOUNT

3/16" INCREMENTS

1/8" DOWEL PINS - 2PL.

REV.	PART OR POSITION NO.	DESCRIPTION - MATERIAL - FINISH	SCALE:	DRAWN:	ENGR:	APPR:	REF:
2	624-1031	GUSSET - 2.4	1:1.5	RSK	MICHELSON		624-0016
1	624-1030	PLATE - BASE, MOTOR, 2.4					
1	624-1029	BASE PLATE-FACE MOUNT, 2.4					

1. REFER TO DRAWING 624-1003A FOR 624-1029 MOUNTING HOLE DIMENSIONS.

NOTES:


1. THE INFORMATION INCLUDED HEREIN IS THE EXCLUSIVE PROPERTY OF
MAGNETIC BRAKE SYSTEMS
 A DIVISION OF TECHNICAL FILM SYSTEMS, INC.
 OR MAY CONTAIN PROPRIETARY RIGHTS OF OTHERS AND IS NOT TO BE USED OR
 REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF THE ABOVE

ASSY. - BASE MOUNT, SH 1 DF 1
 DB-2.4-BM C624-0125



MAGNETIC BRAKE SYSTEMS

20. DYNAMOMETER CONTROLLER

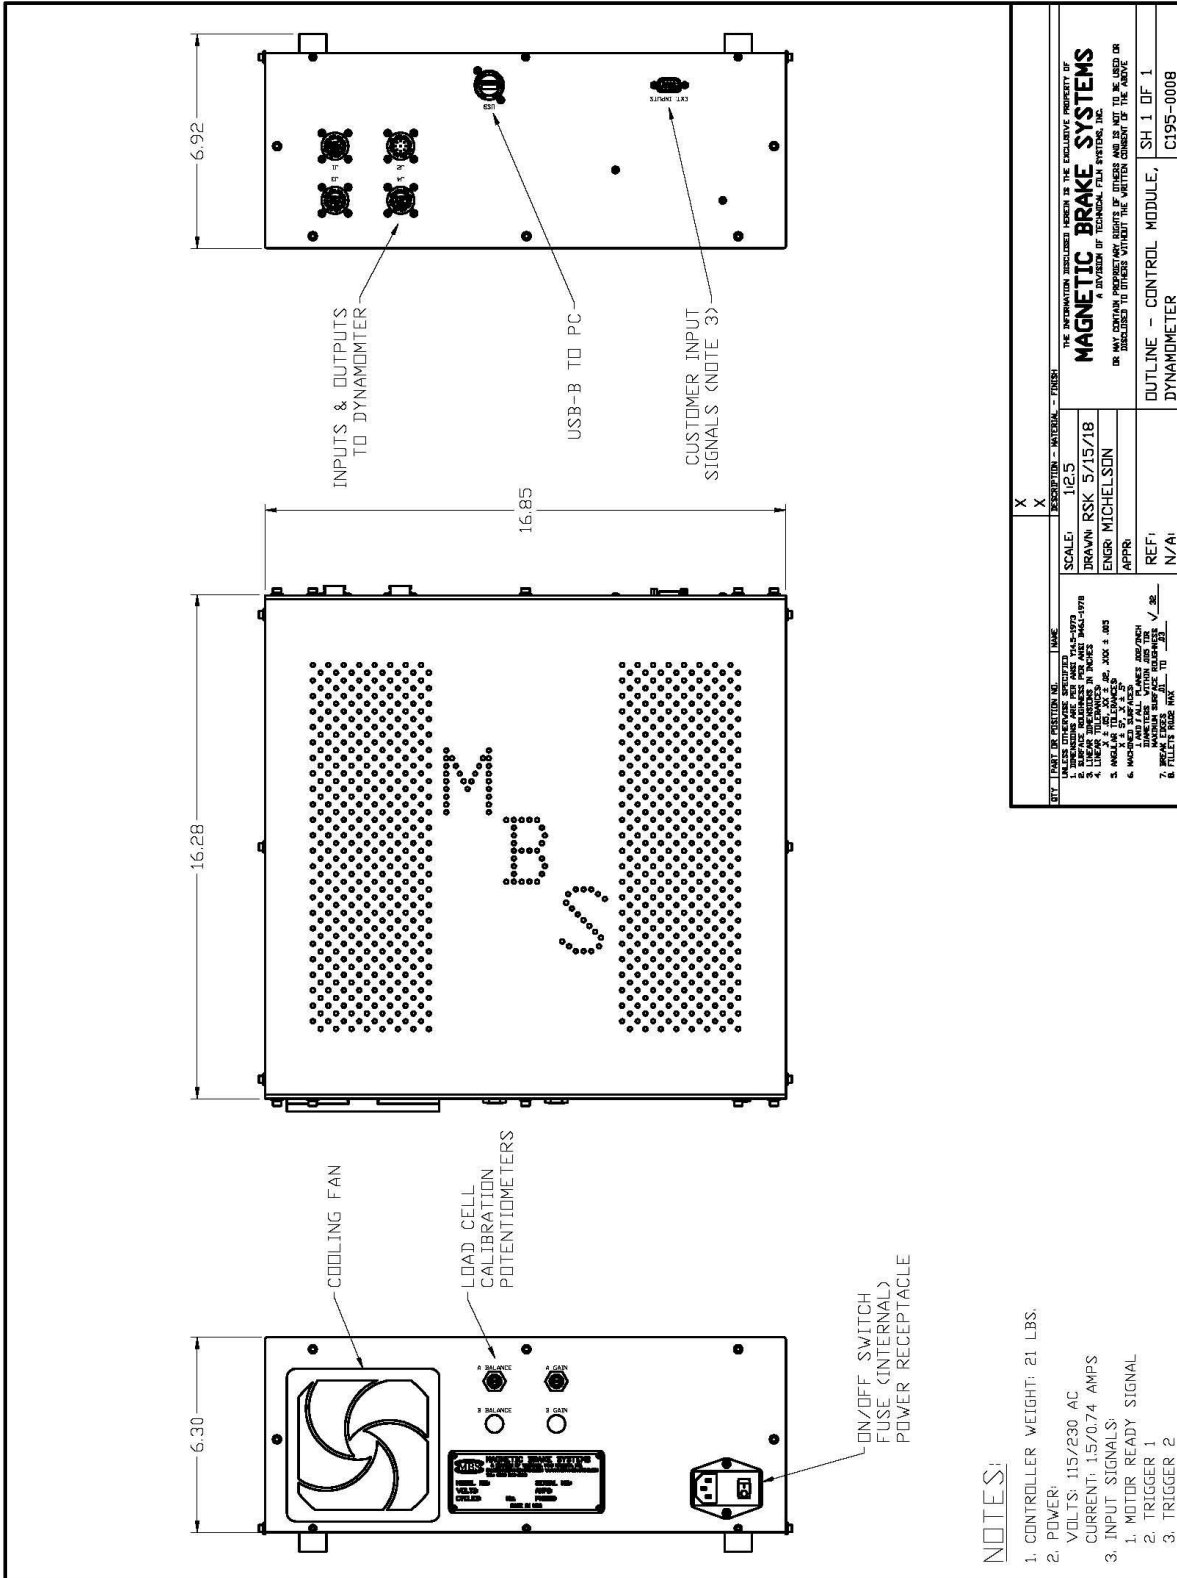

NOTES:


1. CONTROLLER WEIGHT: 21 LBS.
2. POWER:
VOLTS: 115/230 AC
CURRENT: 1.5/0.74 AMPS
3. INPUT SIGNALS:
1. MOTOR READY SIGNAL
2. TRIGGER 1
3. TRIGGER 2

REF. TABLE FOR SPECIFICATION NO. 1125	DESCRIPTION - MATERIAL - FINISH	THE INFORMATION DISCLOSED HEREON IS THE EXCLUSIVE PROPERTY OF MAGNETIC BRAKE SYSTEMS A DIVISION OF TECHNICAL DATA SYSTEMS, INC. OR MAY CONTAİN PROPRIETARY RIGHTS OF OTHERS AND IS NOT TO BE USED OR DISCLOSED TO OTHERS WITHOUT THE WRITTEN CONSENT OF THE ABOVE	
SCALE: 1:2.5	DRAWN: RSK 5/15/18	OUTLINE - CONTROL MODULE, DYNAMOMETER	
ENGR: MITCHELSON	APPR:	SH 1 OF 1	C19S-0008
REF1	N/A1		
1. UNLESS OTHERWISE SPECIFIED	2. SURFACE FINISHES AND ANNEAL		
3. UNLESS OTHERWISE SPECIFIED	4. UNLESS OTHERWISE SPECIFIED		
5. UNLESS OTHERWISE SPECIFIED	6. UNLESS OTHERWISE SPECIFIED		
7. UNLESS OTHERWISE SPECIFIED	8. UNLESS OTHERWISE SPECIFIED		



21. NOMENCLATURE OF DYNAMOMETER MODEL NUMBER

DB6M-8.7T-FM

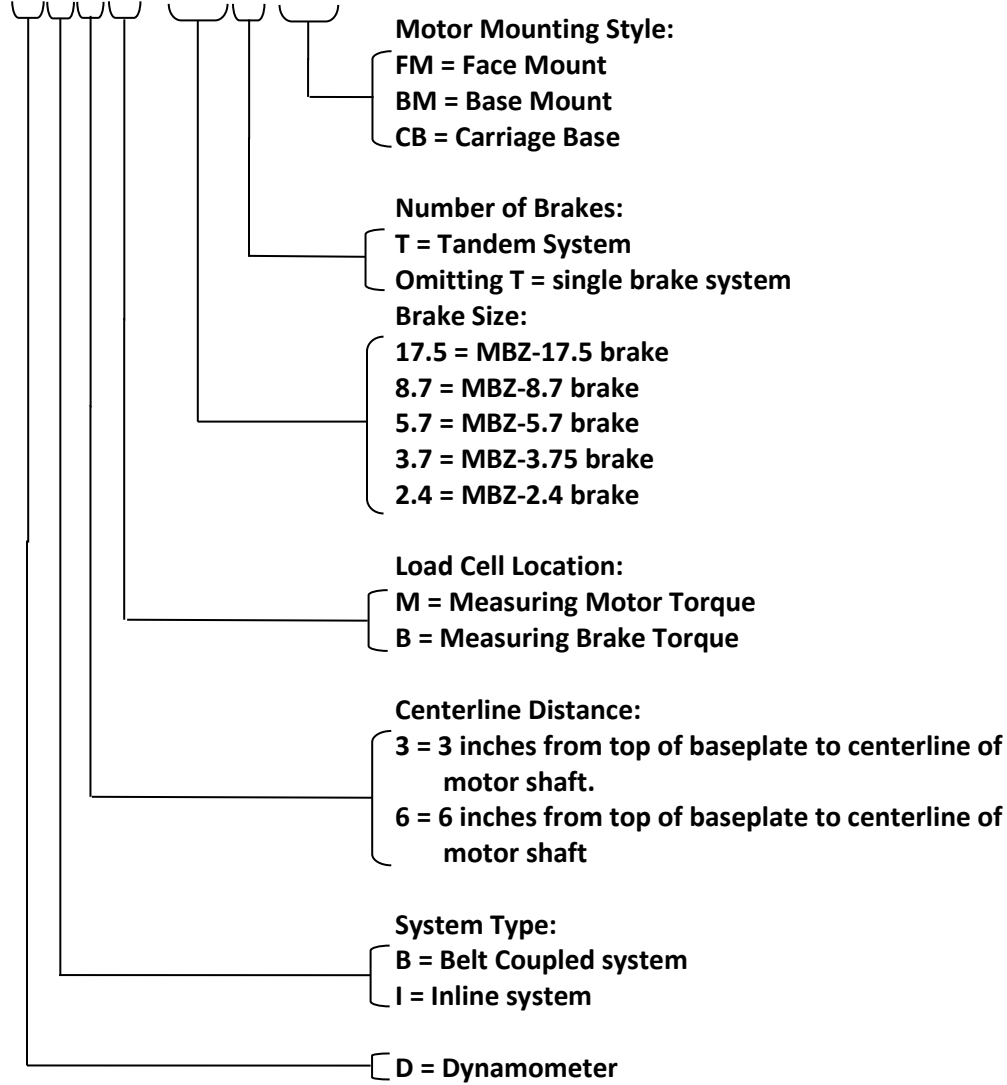

The load cell(s) size(s) and type(s) of voltage & Current transducers are to be specified individually.